



DuraMAX

14 U.S. GAL./53 L PORTABLE WHEELED FUEL CONTAINER

Thank you for purchasing the *flo n'go DuraMAX*.

**TO ENSURE SAFE OPERATION AND ENJOYMENT OF THIS PRODUCT,
PLEASE REVIEW THESE INSTRUCTIONS IN THEIR ENTIRETY BEFORE USE.**

WARNINGS

REMOVE FROM VEHICLE FOR FILLING

1) BEFORE FILLING

Ensure that tank shut-off valve is in the closed position (as shown in Fig. 3).

2) Close tank and hose shut-off valves when not in use.


3) Ensure vent screw on fill cap is closed when not in use to avoid fuel vapour escape.

4) Disconnect hose assembly and drain prior to transport. (See Draining Instructions.)

5) Lifting requires 2 people. When tank is full, weight can exceed 100 lbs. (45 kg.) See Lifting Instructions.

6) Ensure tank is secured when stored in a vertical position.

7) Ensure all connections are tight to avoid leakage.

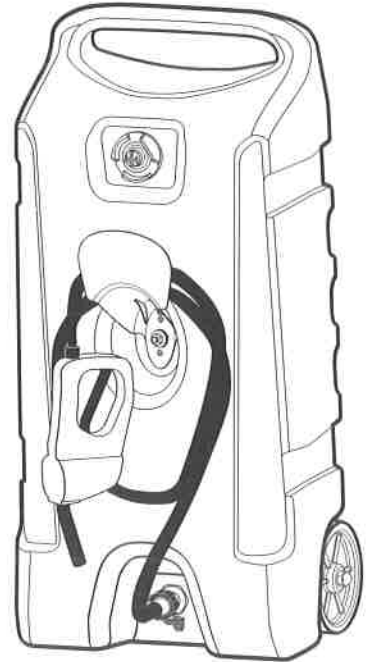

GASOLINE - DANGER EXTREMELY FLAMMABLE

VAPORS CAN EXPLODE when ignited by a spark or flame source many feet away.
VAPORS CAN CAUSE A FLASH FIRE!

- Keep away from flame, pilot lights, stoves, heaters, electric motors and other sources of ignition.
- KEEP OUT OF REACH OF CHILDREN.
- Do not store in vehicle or living space.
- Store in well ventilated area, away from direct sunlight.
- USE OUTDOORS ONLY.
- DO NOT SMOKE when using container.
- Keep container closed when not in use. VAPORS HARMFUL to lungs if inhaled.
- Avoid prolonged breathing of vapors.
- POISON. HARMFUL OR FATAL IF SWALLOWED.
- If swallowed: do not induce vomiting. Call physician immediately.
- Do not siphon by mouth.
- Not suitable for racing fuel.
- Do not overfill container.
- Always place container on ground when filling.
- DO NOT Fill in the back of a pickup truck or inside any vehicle.

**TIE DOWN CONTAINER HORIZONTALLY DURING TRANSPORTATION. FULL CONTAINER IS VERY HEAVY.
REMOVAL FROM VEHICLE REQUIRES MORE THAN ONE PERSON.**

FlonGo DuraMAX

ASSEMBLY INSTRUCTIONS

USING YOUR DuraMAX

- #1 Connect hose assembly (as per Fig. 2).
- #2 Open both tank shut-off valve and hose shut-off valve.
- #3 Open vent screw on fill cap.
- #4 DuraMAX operates in a gravity feed mode, therefore DuraMAX **MUST BE HIGHER** than tank to be filled. Squeeze pump handle repeatedly to start the flow of fuel. Hold the pump handle to continue filling. Let go of pump handle to stop flow of fuel.
- #5 Close vent screw and both shut-off valves.
- #6 Hang hose on hanger.

FIG. 1

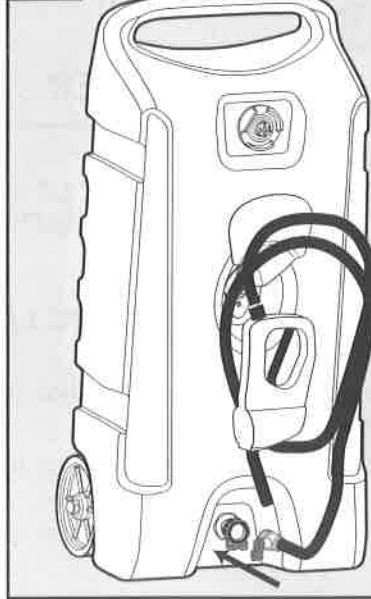


FIG. 2



FIG. 3



FILLING INSTRUCTIONS

- #1 Lay tank in horizontal position.
- #2 Ensure tank shut-off valve is closed.
- #3 Remove fill cap.
- #4 Pump fuel. - **DO NOT OVERFILL**
- #5 Replace fill cap, ensure manual vent screw on cap is closed.
- #6 Containers should never be filled in or on the back of a pickup truck, marine craft, or any other vehicle.
- #7 Fill the container slowly to decrease the chance of static electricity buildup and to minimize spilling or splattering.
- #8 **NEVER** smoke, use lighters, light matches, use cell phones or other electrical devices while filling.
- #9 Refer to posted warnings on dispensing pump.

LIFTING INSTRUCTIONS

- #1 **IMPORTANT-TANK IS HEAVY, DO NOT** attempt to lift alone.
- #2 Lay tank in horizontal position.
- #3 Use top pull handle and hand holds on base to lift. **ONE PERSON AT EACH END.**

HOSE DRAINING INSTRUCTIONS

- #1 Lay tank in horizontal position.
- #2 Close both shut-off valves.
- #3 Disconnect hose assembly and remove fill cap.
- #4 Insert nozzle into fill neck.
- #5 Keep valve above nozzle. Open hose shut-off valve.
- #6 Squeeze pump handle repeatedly until hose is empty. Close hose shut-off valve.
- #7 Replace fill cap.

DUE TO CONTOURS OF TANK, DURAMAX UNIT MAY NOT FULLY DRAIN.

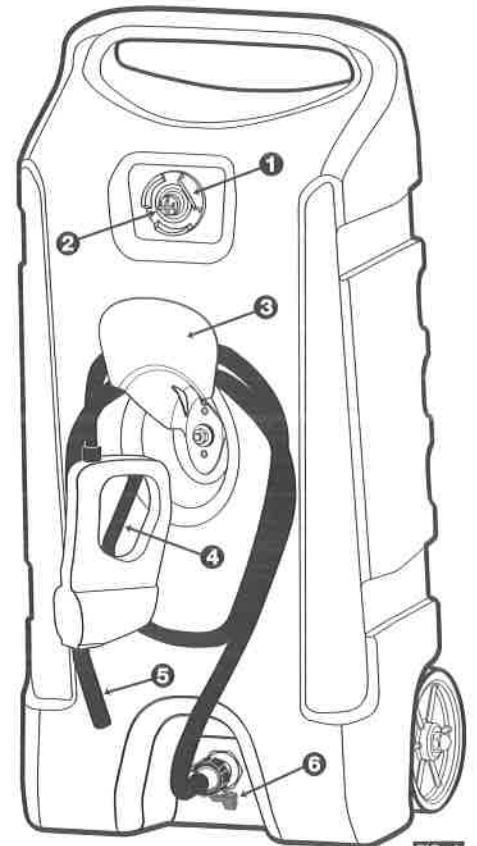


FIG. 4

1. Fill Cap
2. Vent Screw
3. Hose Hanger
4. Pump Handle
5. Pump Nozzle
6. Tank Shut-off Valve (closed position)
7. Hose Shut-off Valve (closed position)