
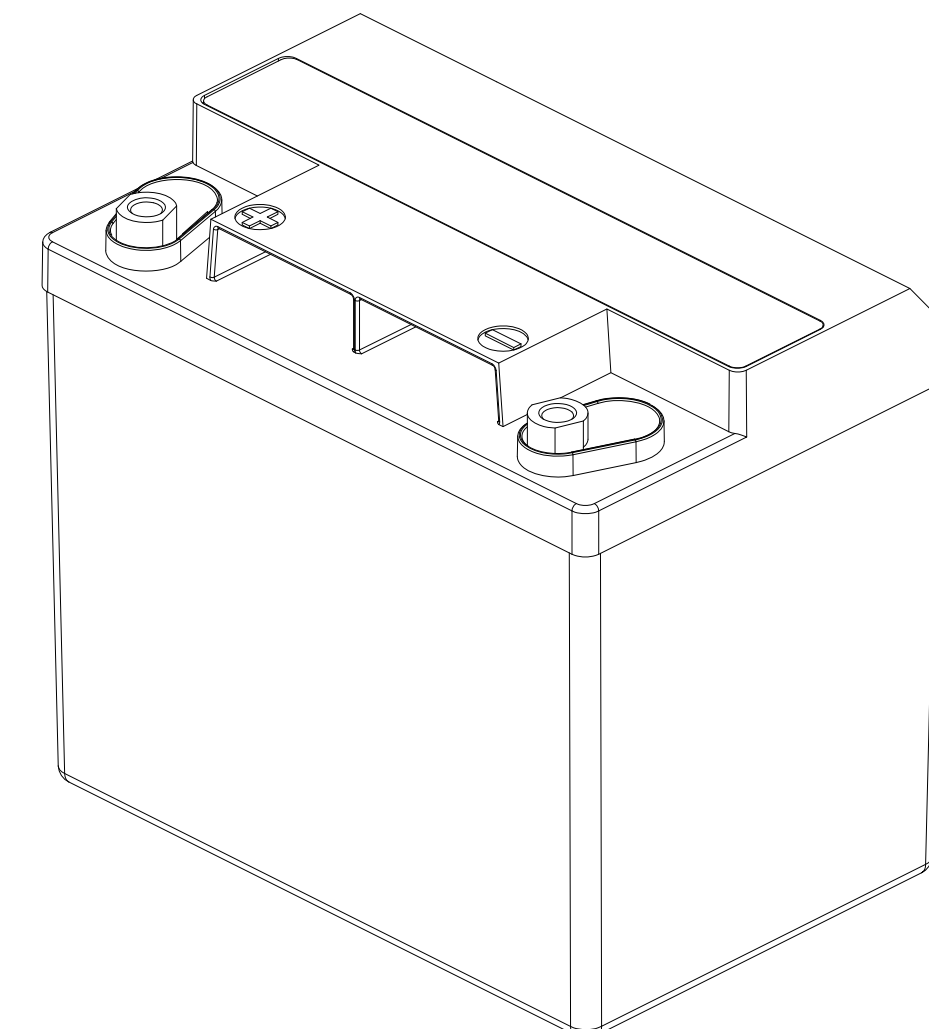




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00293 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED NOTE 1	8/29/16	PH

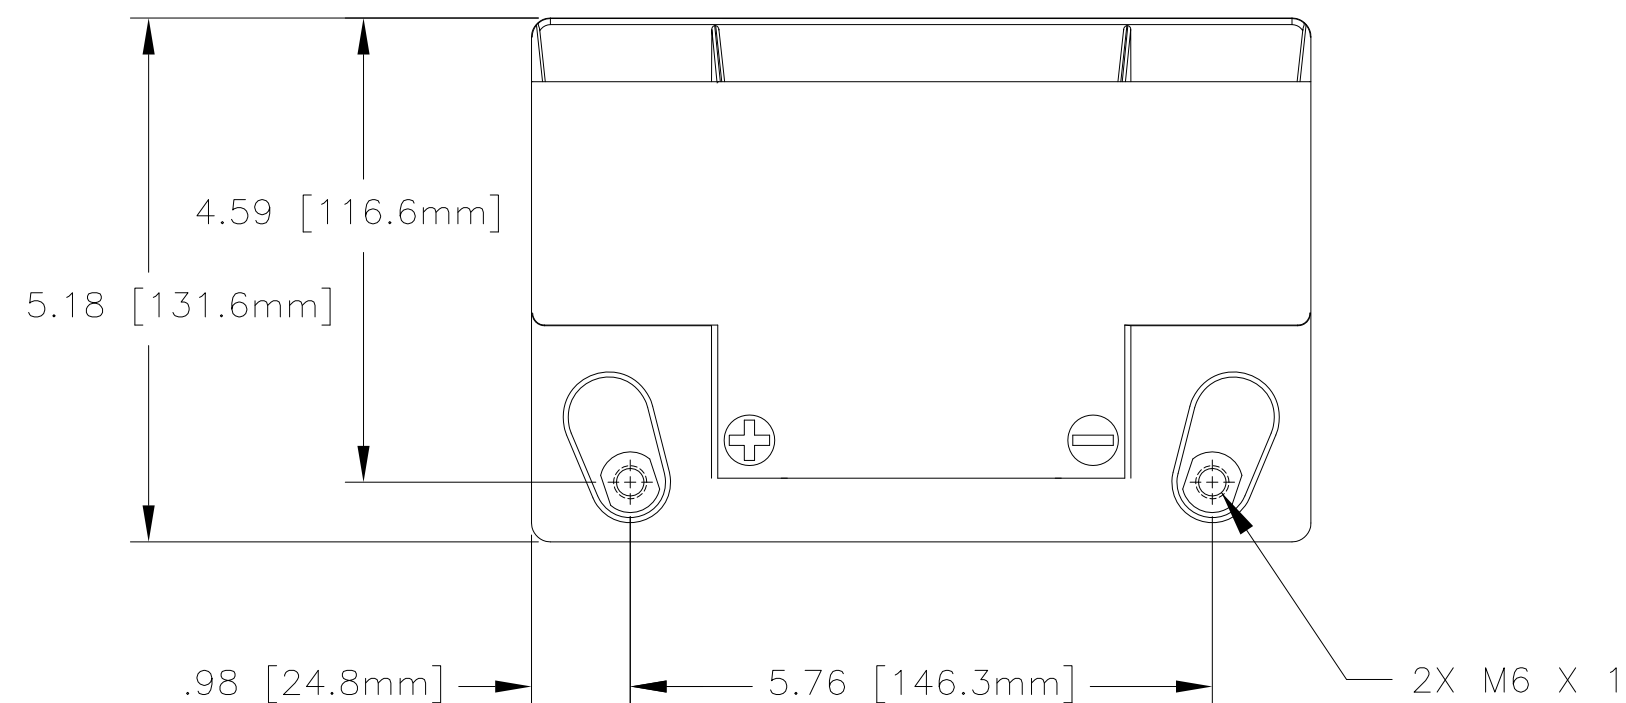

REFERENCE VIEW

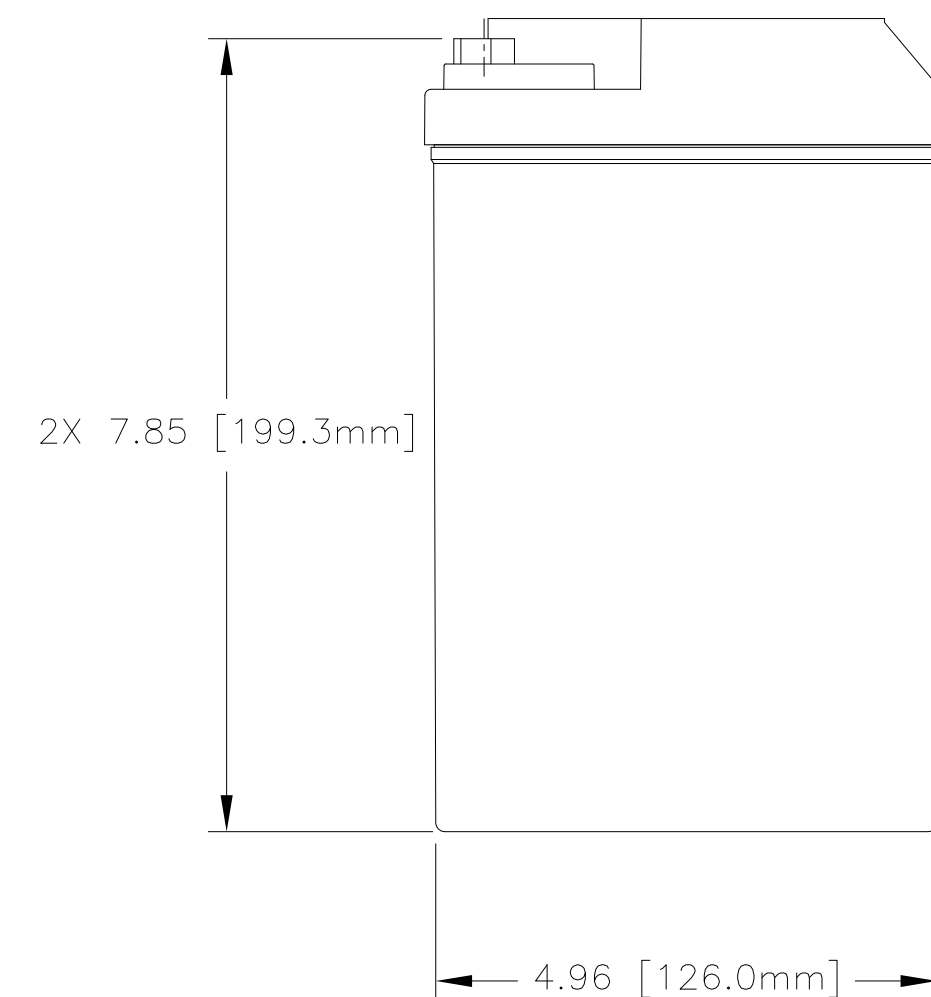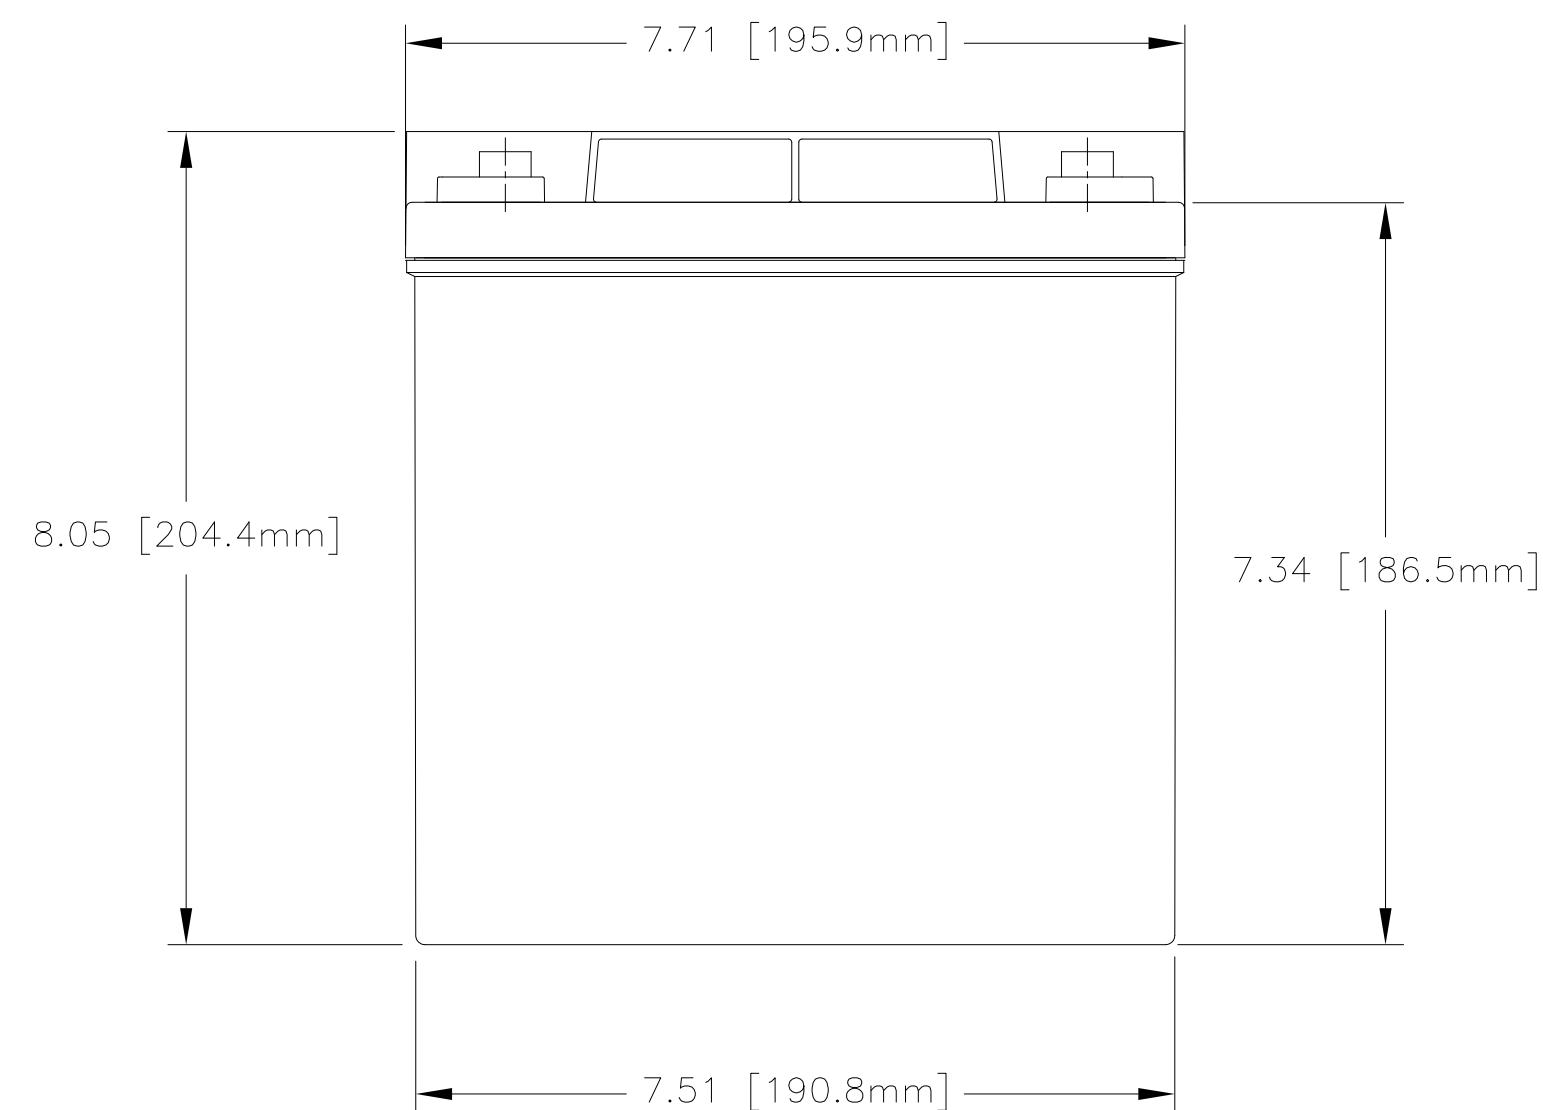

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-420T
NOMINAL WEIGHT	30 LBS[13.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	42 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS	DECIMALS	ANGLES	CONTRACT NO.	TITLE	
± 1/32	.XX ± .06	± 1°	NA	BATTERY, SLA, 12 VOLT, PVX-420T	
	.XXX ± .030		APPROVALS	DATE	SIZE
			DRAWN ELH	8/13/01	CAGE CODE
TREATMENT	NONE	CHECKED HRF	8/20/01	DWG NO.	REV
FINISH	NONE	APPROVED JBT	8/23/01	PVX-420T	A
SIMILAR TO NA	ACT WT NA	CALC WT NA	ISSUED JG	9/01/16	SCALE NONE
				SHEET	1 OF 1