





Lite & Bright



2022

legenda per articoli a LED
legend for LED items

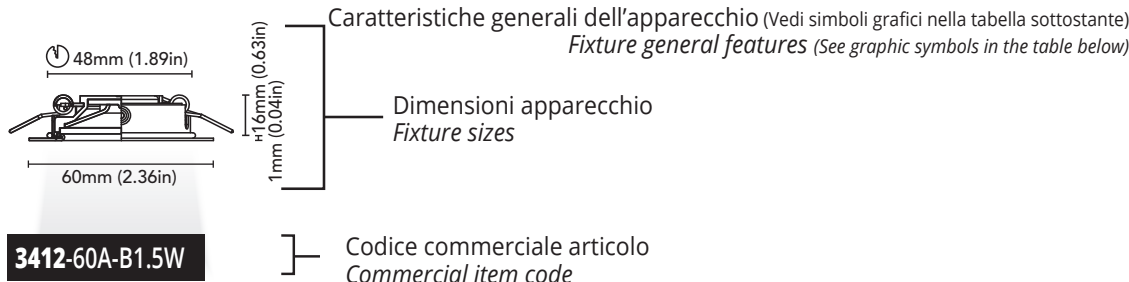

SIMBOLI E SEGNI GRAFICI - SYMBOLS AND GRAPHIC SIGNS

	Classe I <i>Class I</i>		Classe II <i>Class II</i>		Classe III <i>Class III</i>		Apparecchio dimmerabile. <i>Dimmable light fixture.</i>		Apparecchio predisposto per il montaggio su superfici normalmente infiammabili. <i>Light fitting for application on normally combustible surfaces.</i>
	IP6- Stagno alla polvere. IP-5 Apparecchio protetto contro i getti d'acqua. <i>IP6- Dust tight light fitting. IP-5 Water jet-proof light fitting.</i>								
	L'apparecchio se correttamente sigillato in incasso stagno diventa IP65 (protetto alla polvere e ai getti d'acqua). <i>Light fittings belongs to the class IP65 (i.e. dust-tight and jet-proof) if properly tightened to the ceiling.</i>								
	IP6- Stagno alla polvere. IP-6 Apparecchio protetto contro i getti potenti d'acqua. <i>IP6- Dust tight light fitting. IP-6 Powerfull Water jet-proof light fitting.</i>								
	IP6- Stagno alla polvere. IP-7 Apparecchio protetto dall'effetto di immersione temporanea. <i>IP6- Dust tight light fitting. IP-7 Light fixture protected against the effect of temporary immersion.</i>								
	IP6- Stagno alla polvere. IP-8 Funzionamento in immersione prolungata alla profondità di ... metri. <i>IP6- Dust tight light fitting. IP-8 Operation white submerged for long periods at a depth of ... metres.</i>								

VARIE - MISCELLANEOUS

	La scatola di connessione viene fornita solo su richiesta. <i>Connection box is supplied on request only.</i>
--	--

Tutti gli apparecchi di illuminazione presenti in questo catalogo sono costruiti in conformità alle Normative Europee EN 60598-1 e 60598-2... ed equivalenti alle Norme Internazionali IEC 60598-1 e 60598-2...L'azienda garantisce che i prodotti sono conformi ai requisiti essenziali delle seguenti Direttive Europee UE-CE:
DBT 2014/35/UE (Direttiva Bassa Tensione);
EMC 2014/30/UE (Compatibilità Elettromagnetica);
RoHS 2002/95/CE (Restrizioni sull'uso di sostanze pericolose);
RAEE 96/02/CE (L'azienda salvaguarda l'ambiente aderendo ad un Consorzio);
ErP 2009/125/CE (Etichetta Energetica).

Dichiarazione etica: per la ns. produzione non utilizziamo bambini e contribuiamo alla salvaguardia dell'ambiente. Dichiarazione di Origine del prodotto: in conformità al Regolamento 1207/01/CE (mod. Reg. 1617/2006, Reg. 75/2008).

*Every lighting fixture contained in this catalogue is produced inside the firm, in compliance with the European Standard EN 60598-1 and 60598-2... and equivalent to the International Standard IEC 60598-1 and 60598-2...The company declares that products comply with the essential requirements of the following European Directives CE:
LVD 2014/35/UE (Low Voltage Directive);
EMC 2014/30/UE (Electromagnetic Compatibility);
RoHS 2002/95/CE (Restrictions on the use of Hazardous Substances);
RAEE 96/02/CE (The company protects the environment supporting a Pool);
ErP 2009/ 125/UE (Energy Label).*

Ethics statement: for our production we don't use children and contribute to the protection of the environment. Declaration of Origin of the product: according to Regulation 1207/01/CE (mod. Reg. 1617/2006, Reg. 75/2008).

20

bianco
white

4

acciaio lucido
polished stainless steel

34

acciaio satinato
satin steel

3

cromo lucido
polished chrome

ALTRE FINITURE SU RICHIESTA.
OTHER FINISHES ON REQUEST.

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.

Colours are indicative for their own naturue and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.

Downlights - 8

								
ocean 10	ring 12	malibu 14	newport 16	orlando 18	phoenix 20	seattle 22	atlanta 24	charlotte 26

							
daytona 28	venice 30	miami 32	colorado 34	aspen 36	alaska 38	anchorage 40	alabama 42

Courtesy Lights - 44








										
dallas 46	bedford 46	california 50	savannah 52	tampa 54	sarasota 54	florida 56	portland 56	columbia 58	nevada 58	dana 60

Reading Lights - 64


Wave Neonflex - 74

										
baltimore 60	detroit 62	boston 62	catalina 66	ventura 68	arizona 70	philly 72	wave neonflex side 78	wave neonflex top 78	wave neonflex small 80	wave neonflex double bending 82

Linear Lighting Systems - 88

										
wave neonflex mini side 84	wave neonflex mini top 84	accessories wave neonflex 86	mini blade one, two, three 90	blade one 92	blade two 94	blade three 96	blade four 98	blade five 100	mini flex led one 102	flex led two 104

	Downlights	8
	Courtesy Lights	44
	Reading Lights	64

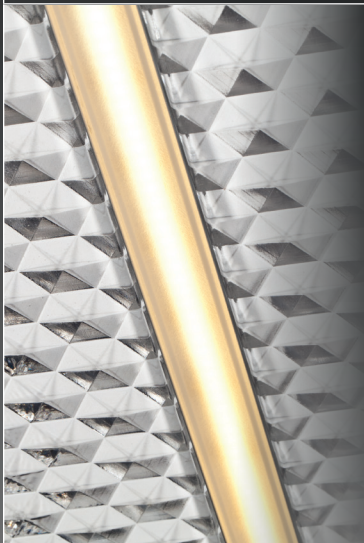	Wave Neonflex	74
	Linear Lighting Systems	88
	Recess mounting box	108



Downlights


Questa linea di faretti si distingue per l'eccellenza dei materiali impiegati e l'alta efficienza luminosa. Tutti gli articoli, orientabili compresi, hanno grado di protezione IP66, l'elegante design si integra perfettamente negli ambienti esterni ed interni. Il corpo stampato in special compound rende i prodotti estremamente versatili, ultraleggeri e compatibili con diversi tipi di superficie.

The downlights of this collection stand up for the excellence of the materials and the high efficiency of the light output. All the articles, adjustable included, are IP66 protection rate. The elegant design is perfectly suitable with both interior and exterior environments. The back-body, made of a special compound, make all the downlights ultra-light and compatible with different types of surfaces.




ocean

. 105




CODE	3479-105A-B8W 3479-105C-B8W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 8W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 242lm 1mt 82lx 2mt 21lx 3mt 9lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 130

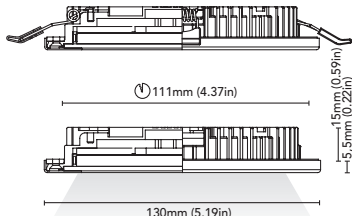


CODE	3479-130A-B10W 3479-130C-B10W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 398lm 1mt 134lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 155


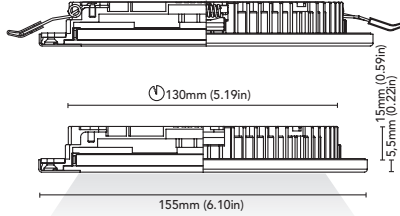


CODE	3479-155A-B12W 3479-155C-B12W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 12W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 492lm 1mt 167lx 2mt 42lx 3mt 19lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 210

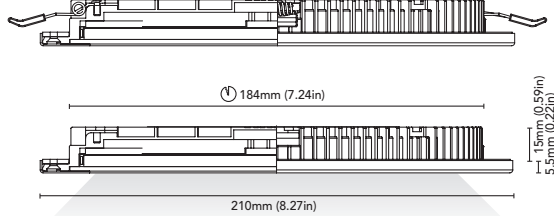

CODE	3479-210A-B18W 3479-210C-B18W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 18W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 865lm 1mt 290lx 2mt 73lx 3mt 32lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

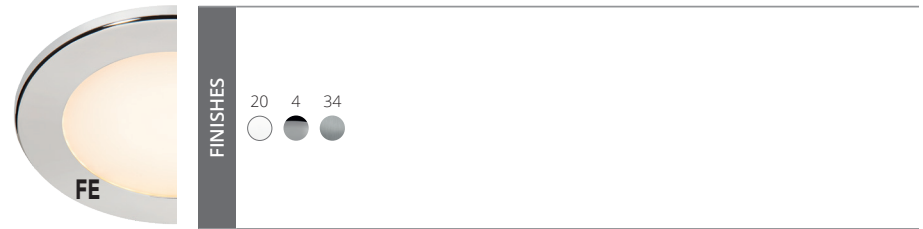


* On request, frame 9000-RING.

ocean - 105, 130, 155, 210

ring


CODE	9000-RING130 X OCEAN 105 9000-RING155 X OCEAN 130 9000-RING180 X OCEAN 155 9000-RING235 X OCEAN 210
FIXTURE	FRAME FOR OCEAN SERIES
MATERIALS	STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS

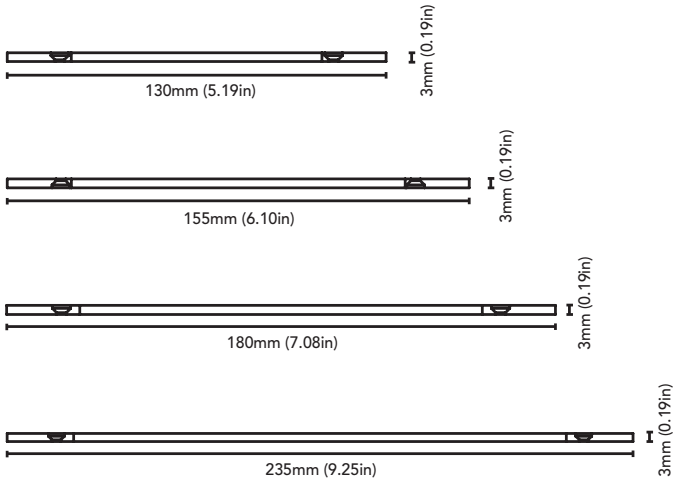

ring - 130, 155, 180, 235



ocean - 105 frame ring - 130

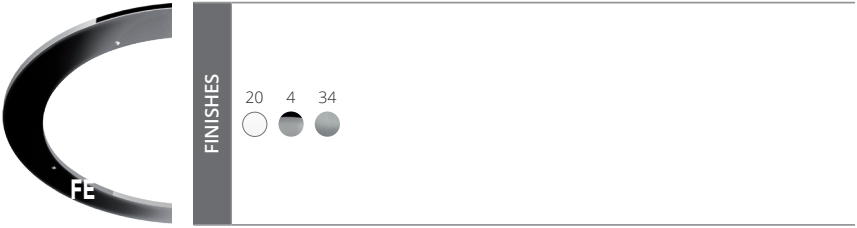


FINISHES
20 4 34




malibù

. 60




CODE	3412-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

. 75




CODE	3412-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 85



CODE	3412-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	


. 95



CODE	3412-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



malibù - 60, 75, 85, 95









newport

. 85

. 95




CODE	3414-85A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3414-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



newport - 85, 95





FINISHES	20 4 34 
----------	--




orlando


. 60




CODE	3406-60A-B1.5W 3406-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	


. 75




CODE	3406-75A-B2W 3406-75C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame


. 85



CODE	3406-85A-B4W 3406-85C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame

. 95



CODE	3406-95A-B6W 3406-95C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame



orlando - 60, 75, 85, 95



*switch









phoenix

. 85

. 95




CODE	3408-85A-B2W 3408-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame

CODE	3408-95A-B4W 3408-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame



phoenix - 85, 95

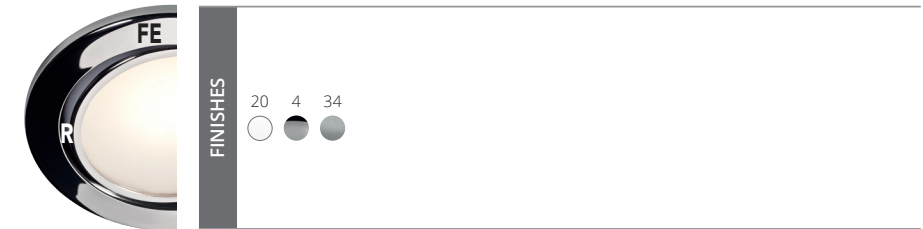


*switch






seattle


. 55




CODE	3413-55A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	




. 70




CODE	3413-70A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	




. 80




CODE	3413-80A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



. 90



CODE	3413-90A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



seattle - 55, 70, 80, 90









atlanta


. 80

. 90




CODE	3415-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3415-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

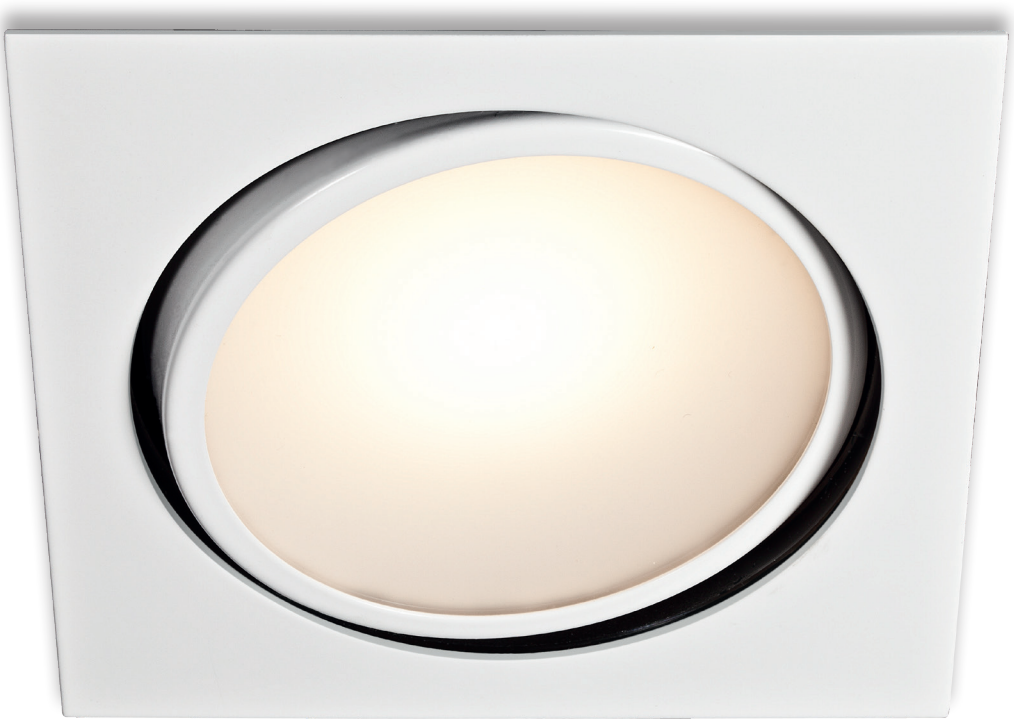

atlanta - 80, 90

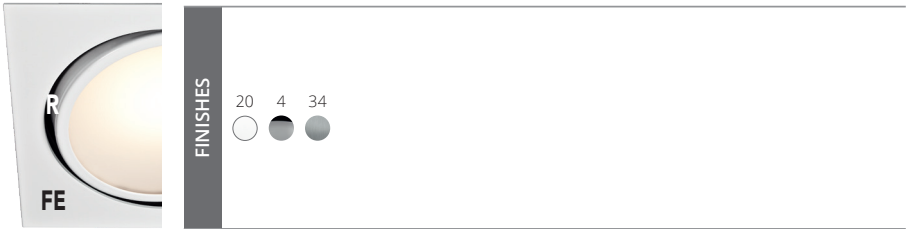







charlotte

. 55

. 70

. 80

. 90



CODE	3407-55A-B1.5W 3407-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3407-70A-B2W 3407-70C-B2W
FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO
POWER LED	POWER LED
1 x MAX 2W	1 x MAX 2W
8-32 Vdc - DRIVER ON BOARD	8-32 Vdc - DRIVER ON BOARD
FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
YES	YES
WIDE	WIDE
OPAL	OPAL
3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
2700K - 4000K - 3000K+RED	
*On request switch on the frame	

CODE	3407-80A-B4W 3407-80C-B4W
FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO
POWER LED	POWER LED
1 x MAX 4W	1 x MAX 4W
8-32 Vdc - DRIVER ON BOARD	8-32 Vdc - DRIVER ON BOARD
FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
YES	YES
WIDE	WIDE
OPAL	OPAL
3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
2700K - 4000K - 3000K+RED	
*On request switch on the frame	

CODE	3407-90A-B6W 3407-90C-B6W
FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO
POWER LED	POWER LED
1 x MAX 6W	1 x MAX 6W
8-32 Vdc - DRIVER ON BOARD	8-32 Vdc - DRIVER ON BOARD
FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
YES	YES
WIDE	WIDE
OPAL	OPAL
3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx 	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
2700K - 4000K - 3000K+RED	
*On request switch on the frame	



charlotte - 55, 70, 80, 90



*switch









daytona

. 80

. 90



CODE	3409-80A-B2W 3409-80C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame

CODE	3409-90A-B4W 3409-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame



daytona - 80, 90




*switch







venice


. 55




CODE	3411-55A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 67lm 1mt 28lx 2mt 7lx 3mt 3lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	


. 70




CODE	3411-70A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	


. 80




CODE	3411-80A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 90



CODE	3411-90A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 260lm 1mt 95lx 2mt 24lx 3mt 11lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

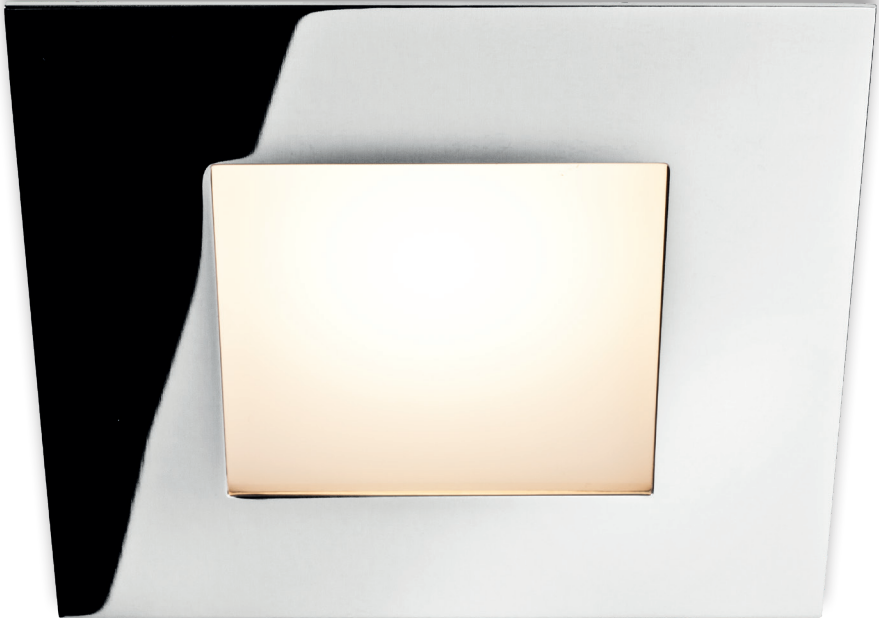

venice - 55, 70, 80, 90



FE

FINISHES


20 4 34






miami


. 55




. 70





. 80





. 90



CODE	3405-55A-B1.5W 3405-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 67lm 1mt 28lx 2mt 7lx 3mt 3lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3405-70A-B2W 3405-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	

CODE	3405-80A-B4W 3405-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	

CODE	3405-90A-B6W 3405-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 260lm 1mt 95lx 2mt 24lx 3mt 11lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	



miami - 55, 70, 80, 90



*switch









colorado

. 77

. 87



CODE	3419-77A-B2W 3419-77AS-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3419-87A-B4W 3419-87AS-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



colorado - 77, 87



colorado - 77S, 87S





FINISHES	20 ○
----------	---------



aspen

. 77

. 87



CODE	3418-77A-B2W 3418-77AS-B2W 3418-77C-B2W 3418-77CS-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	3000K A,C CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3418-87A-B4W 3418-87AS-B4W 3418-87C-B4W 3418-87CS-B4W
FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	3000K A,C CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



aspen - 77, 87



aspen - 77S, 87S





FINISHES
20
○





alaska

. 72

. 82



CODE	3443-72A-B2W 3443-72AS-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K + RED
IP RATE	


CODE	3443-82A-B4W 3443-82AS-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K + RED
IP RATE	



alaska - 72, 82



alaska - 72S, 82S


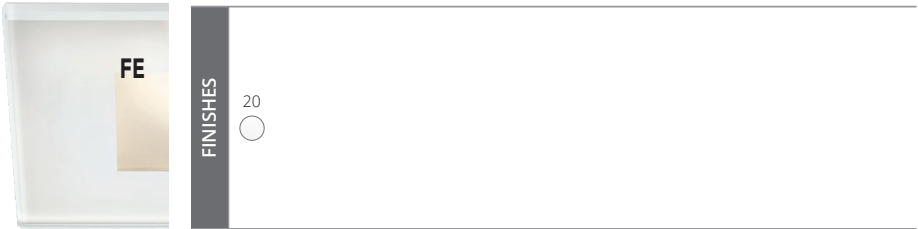




anchorage

. 72


. 82




CODE	3442-72A-B2W 3442-72AS-B2W 3442-72C-B2W 3442-72CS-B2W	3442-82A-B4W 3442-82AS-B4W 3442-82C-B4W 3442-82CS-B4W
FIXTURE	FIXED DOWNLIGHT	FIXED DOWNLIGHT
ADJUSTABILITY	NO	NO
LIGHT SOURCE	POWER LED	POWER LED
POWER	1 x MAX 2W	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES	YES
BEAM	WIDE	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	3000K A,C CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx 	3000K A,C CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx
IP RATE	IP66	IP66
WEIGHT		
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL		
LED COLOUR	2700K - 4000K - 3000K+RED	2700K - 4000K - 3000K+RED
IP RATE		



anchorage - 72, 82

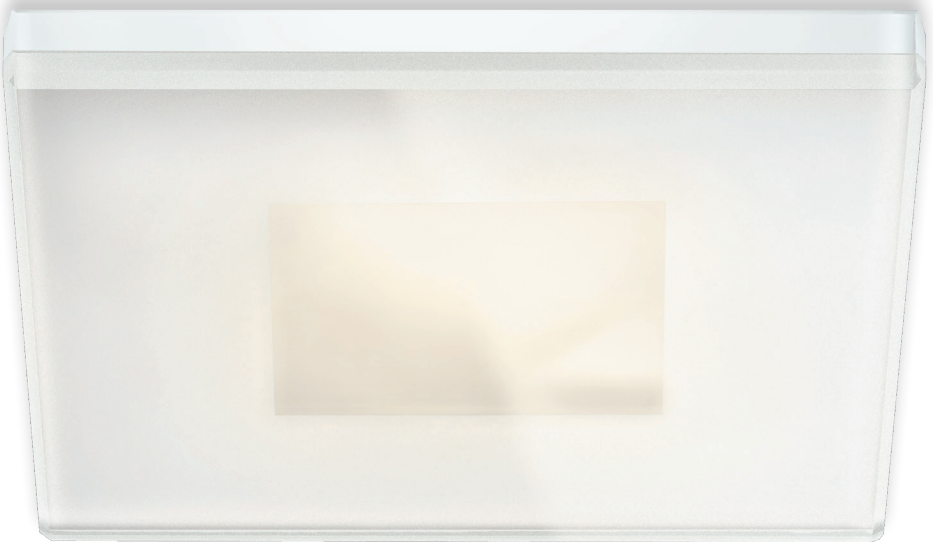

anchorage - 72S, 82S

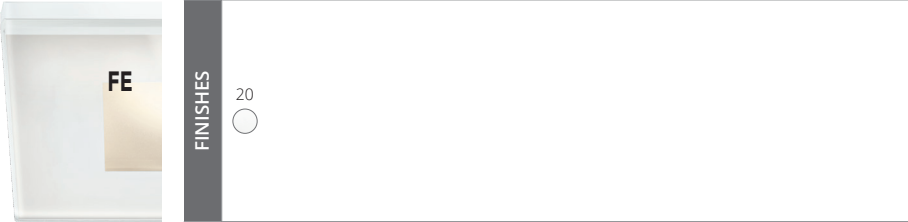







alabama

. 60

. 75

. 85

. 95



CODE	3422-60A-B1.5W 3422-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3422-75A-B2W 3422-75C-B2W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
1 x MAX 2W	
8-32 Vdc - DRIVER ON BOARD	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
OPAL	
3000K	
CRI >80	
LMN 191lm	
1mt 70lx	
2mt 17lx	
3mt 8lx	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
OPTIONAL	
2700K - 4000K - 3000K+RED	

CODE	3422-85A-B4W 3422-85C-B4W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
1 x MAX 4W	
8-32 Vdc - DRIVER ON BOARD	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
OPAL	
3000K	
CRI >80	
LMN 323lm	
1mt 123lx	
2mt 30lx	
3mt 14lx	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
OPTIONAL	
2700K - 4000K - 3000K+RED	

CODE	3422-95A-B6W 3422-95C-B6W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
1 x MAX 6W	
8-32 Vdc - DRIVER ON BOARD	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
OPAL	
3000K	
CRI >80	
LMN 356lm	
1mt 136lx	
2mt 34lx	
3mt 15lx	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
(A) WIRE SPRINGS (C) SCREWS	
OPTIONAL	
2700K - 4000K - 3000K+RED	



alabama - 60, 75, 85, 95



FINISHES	20 4 34
----------	-------------



Courtesy of Fairline Yachts Ltd
Custom version with logo, on
request




Gamma di prodotti ideati per segnapasso, luci di cortesia, etc.
La collezione include anche piccoli "gioielli" per creare innumerevoli effetti luminosi.

*Range of products designed for path markers, courtesy lights, etc.
The collection also includes small "jewels" to create many lighting effects.*




dallas

1L . 40




CODE	3477-40U-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

2L . 40



CODE	3477-40G-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	


. 40



CODE	3478-40-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	



dallas 1L . 40

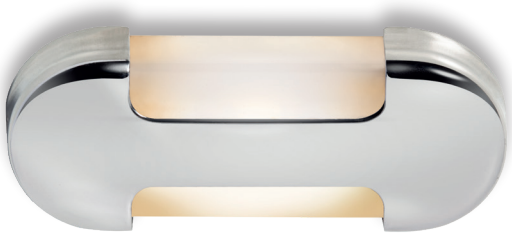

dallas 2L . 40



bedford . 40









california

. 60




CODE	3423-60A-B1.5W 3423-60C-B1.5W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 30lm 1mt 11lx 2mt 3lx 3mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

. 75




CODE	3423-75A-B2W 3423-75C-B2W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 65lm 1mt 22lx 2mt 6lx 3mt 2lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 85



CODE	3423-85A-B4W 3423-85C-B4W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 137lx 2mt 9lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 95



CODE	3423-95A-B6W 3423-95C-B6W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 106lm 1mt 41lx 2mt 10lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



california - 60, 75, 85, 95




FINISHES	20 4 34
----------	-------------




savannah


. 40



CODE	3432-40-B1.5W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 30lm 1mt 11lx 2mt 3lx 3mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	



savannah 40








tampa


sarasota

. 40

. 40



CODE	3416-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	CLEAR
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 336lx 2mt 84lx 3mt 37lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3417-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	CLEAR
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 336lx 2mt 84lx 3mt 37lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	



tampa 40



sarasota 40







florida

portland

1L-2L . 40

1L-2L . 40



CODE	3420-40G-B1.5W 3420-40U-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	


CODE	3421-40G-B1.5W 3421-40U-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	



florida 1L-2L . 40




portland 1L-2L . 40

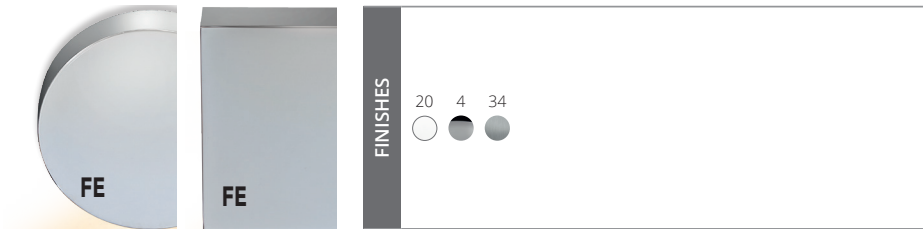




columbia nevada

. 35



CODE	3452-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	

. 35




CODE	3454-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



columbia 35



nevada 35

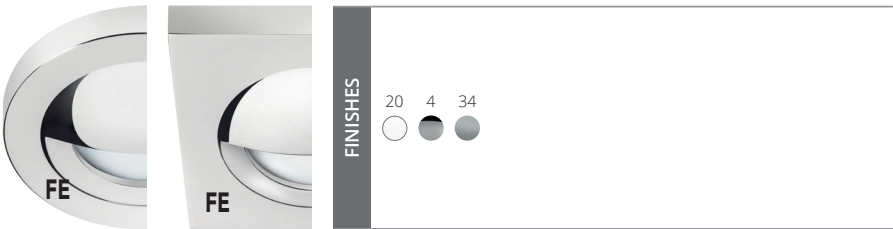




dana


baltimora

. 35



CODE	3453-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	

. 35




CODE	3455-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



dana 35



baltimora 35

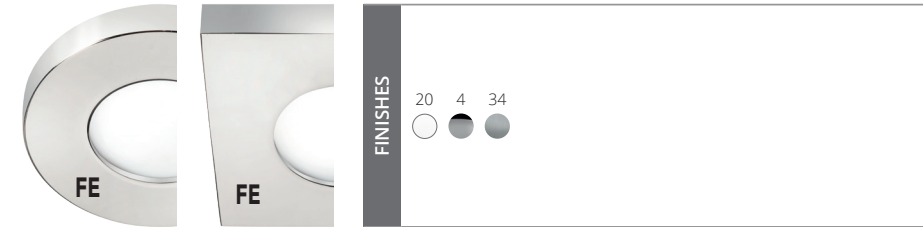





detroit

boston

. 20

. 20



CODE	3450-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	PRESS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	


CODE	3451-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >80
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	PRESS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



detroit 20



boston 20

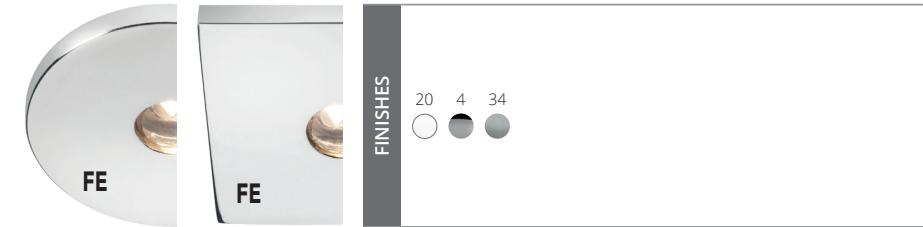




Reading Lights

Elementi luce flessibili e direzionabili, da parete o da tavolo,
realizzati per la lettura o illuminazione puntuale.



*Flexible and adjustable lighting elements,
for wall or table, for reading or precise illumination.*



catalina




CODE	2182-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 336lx 2mt 84lx 3mt 37lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	





catalina



ventura




CODE	2184-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 336lx 2mt 84lx 3mt 37lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	




ventura




arizona



CODE	2185-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - DRIVER ON BOARD
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 336lx 2mt 84lx 3mt 37lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	




arizona





philly


. 45



CODE	2186-I-B3W
FIXTURE	READING ADJUSTABLE LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	LED
POWER	1 x MAX 3W
SUPPLY	8-32 Vdc
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED
IP RATE	




philly




Wave Neonflex

Soluzione flessibile per illuminazione diffusa a LED che consente di creare disegni luminosi lineari e curvi su soffitti, pareti etc, in ambienti interni ed esterni.

Flexible solution for diffused LED lighting, it allows the creation of linear and curve lighting decorations on ceilings, walls. etc. for indoor and outdoor environment.

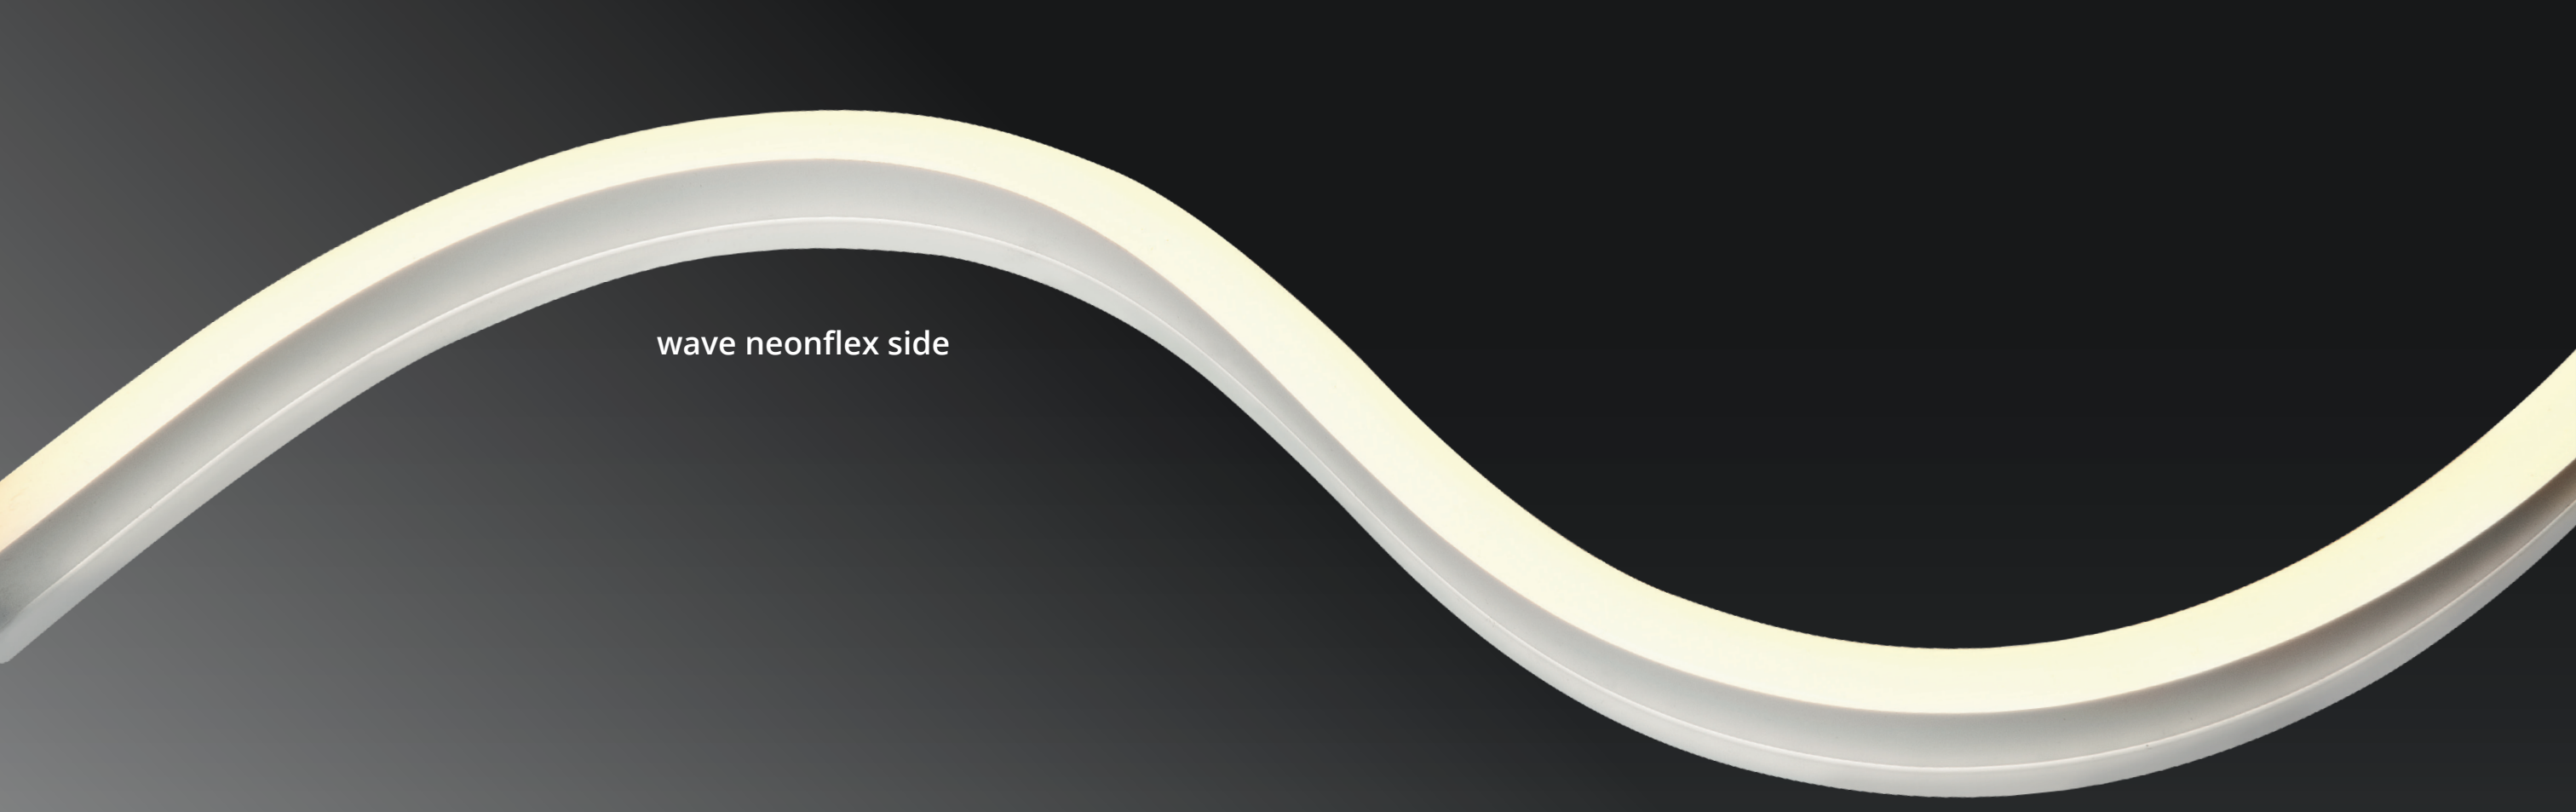

wave neonflex side

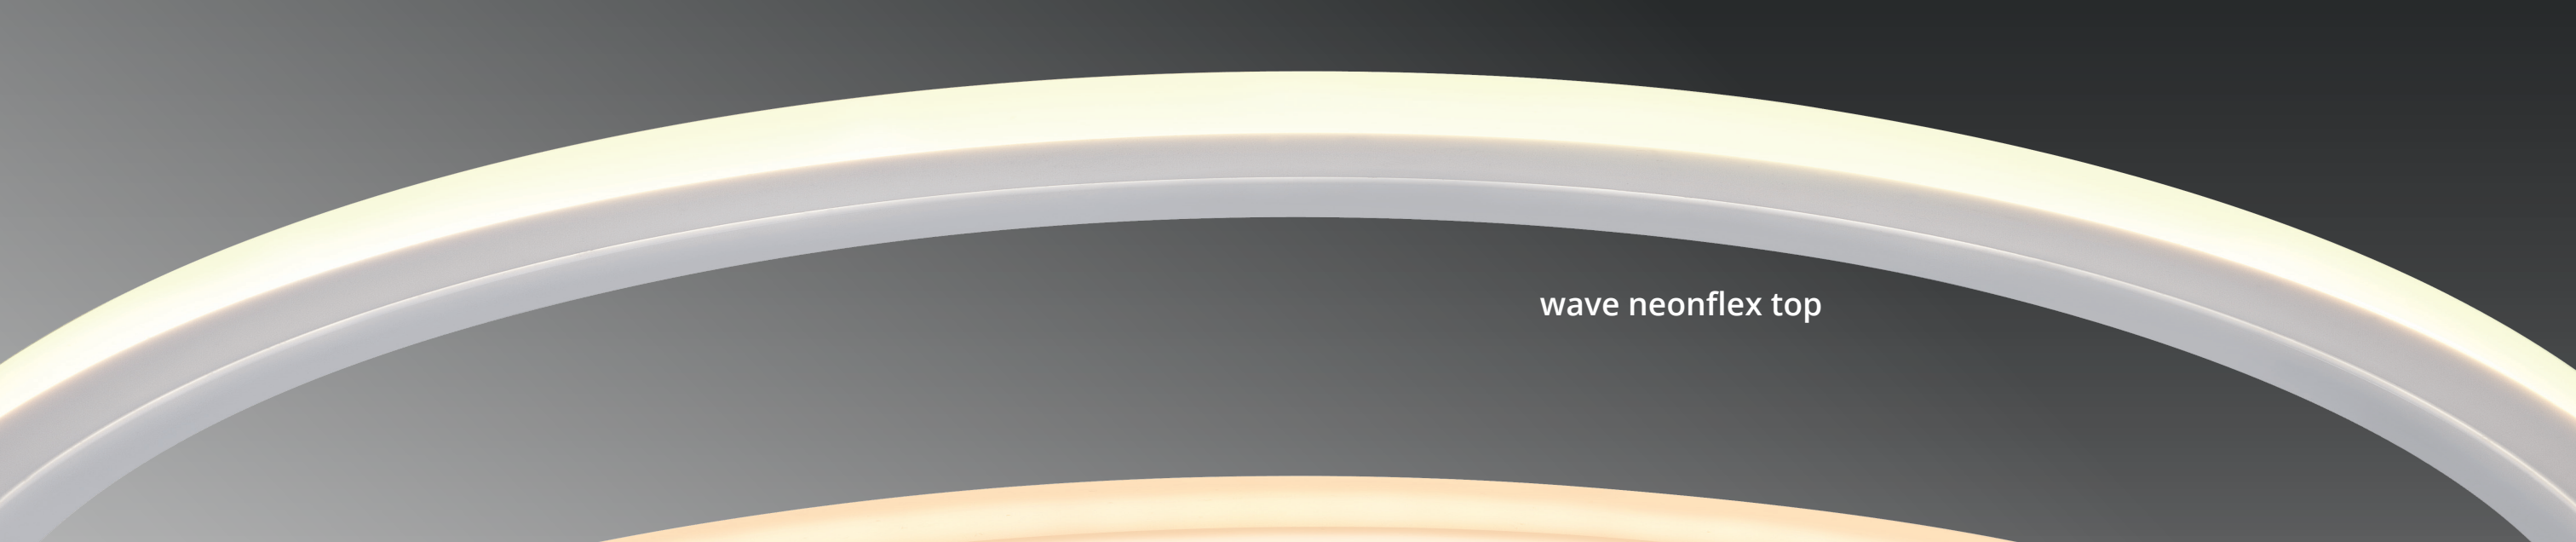

wave neonflex top




wave neonflex small



wave neonflex

• side

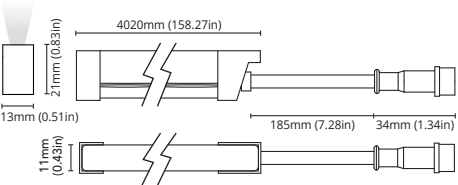


CODE	5403-4MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	 wide
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 520lm/m IP68
IP RATE	
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED

OPTIONAL	
LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	

On request 12Vdc available.




• top

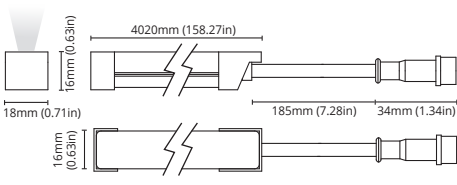

CODE	5401-4MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	 wide
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 820lm/m IP68
IP RATE	
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED

OPTIONAL	
LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	


On request 12Vdc available.






wave neonflex

• small

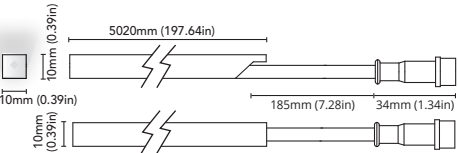

CODE	5404-5MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	 wide
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 690lm/m
IP RATE	IP68
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED
OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	


On request 12Vdc available.





wave neonflex

double bending

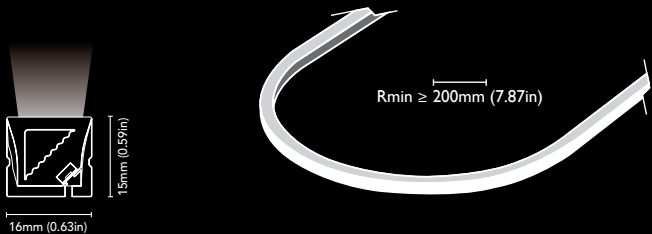


CODE	5408-5MT-10WM
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W/M
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	MILKY
LED COLOUR	3000K CRI >90 LMN 430lm/m IP67
IP RATE	
WEIGHT	
MATERIALS	BODY: SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K, 4000K, 6000K






wave neonflex

• mini side



CODE	5407-5MT-6WM
FIXTURE	FLEXIBLE LED LIGHTING SOLUTION
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	6W/MT
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	 wide
SCREEN	MILKY
LED COLOUR	3000K CRI >90 LMN 253lm/m IP67
IP RATE	
WEIGHT	
MATERIALS	SILICONE MATERIAL
MOUNTING SYSTEM	CLIPS
OPTIONAL	
LED COLOUR	2700K - 4000K - 6000K
IP RATE	

• mini top





5406-5MT-6WM
FLEXIBLE LED LIGHTING SOLUTION
NO
POWER LED
6W/MT
24 Vdc
YES
 wide
MILKY
3000K CRI >90 LMN 345lm/m IP67
SILICONE MATERIAL
CLIPS
2700K - 4000K - 6000K

mini side

mini top

accessories wave neonflex


	 19mm (0.75in) 21.4mm (0.84in)	 14mm (0.55in) 26.4mm (1.04in)	 11.5mm (0.45in) 12.5mm (0.49in)	 12.7mm (0.50in) 13mm (0.51in)	 8.25mm (0.32in) 6mm (0.24in)	 6.35mm (0.25in) 7mm (0.27in)
CODE	5401-PRO5	5403-PRO6	5404-PRO4	5404-PRO11	5406-PRO9	5407-PRO10
	X ART. 5401-4MT-10WM	X ART. 5403-4MT-10WM	X ART. 5404-5MT-10WM	X ART. 5404-5MT-10WM	X ART. 5406-5MT-10WM	X ART. 5407-5MT-10WM
	POLYCARBONATE PROFILE	ALUMINUM PROFILE	ALUMINUM PROFILE	PLASTIC PROFILE	ALUMINUM PROFILE	ALUMINUM PROFILE
ACCESSORIES						
	 17mm (0.67in) 21.4mm (0.84in)	5401-SPR, 5403-SPR, 5404-SPR 5406-SPR, 5407-SPR, 5408-SPR	5401-PEC, 5403-PEC, 5404-PEC 5406-PEC, 5407-PEC, 5408-PEC			
	X ART. 5408-5MT-10WM					
	ALUMINUM PROFILE	CLIPS STAINLESS STEEL	PLASTIC ENDCAP			
						

Tagli di luce per ogni soluzione d'illuminazione,
impiegabili con strip led di diverse potenze.


*Linear profiles for every lighting solutions,
to combine with led strips of different power.*

mini blade


one . A



two . B




three . C




CODE	5070-P06
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH
SMOKED SCREEN VERSION


ACCESSORIES	
PLASTIC END CAPS 2X	5070-PEC06 
BAND CLIP	5070-MC06 

5070-P07
OPAL
BODY: ALUMINIUM
SCREWS

5070-PEC07 
5070-MC07 

5070-P08
OPAL
BODY: ALUMINIUM
SCREWS


5070-MEC08 

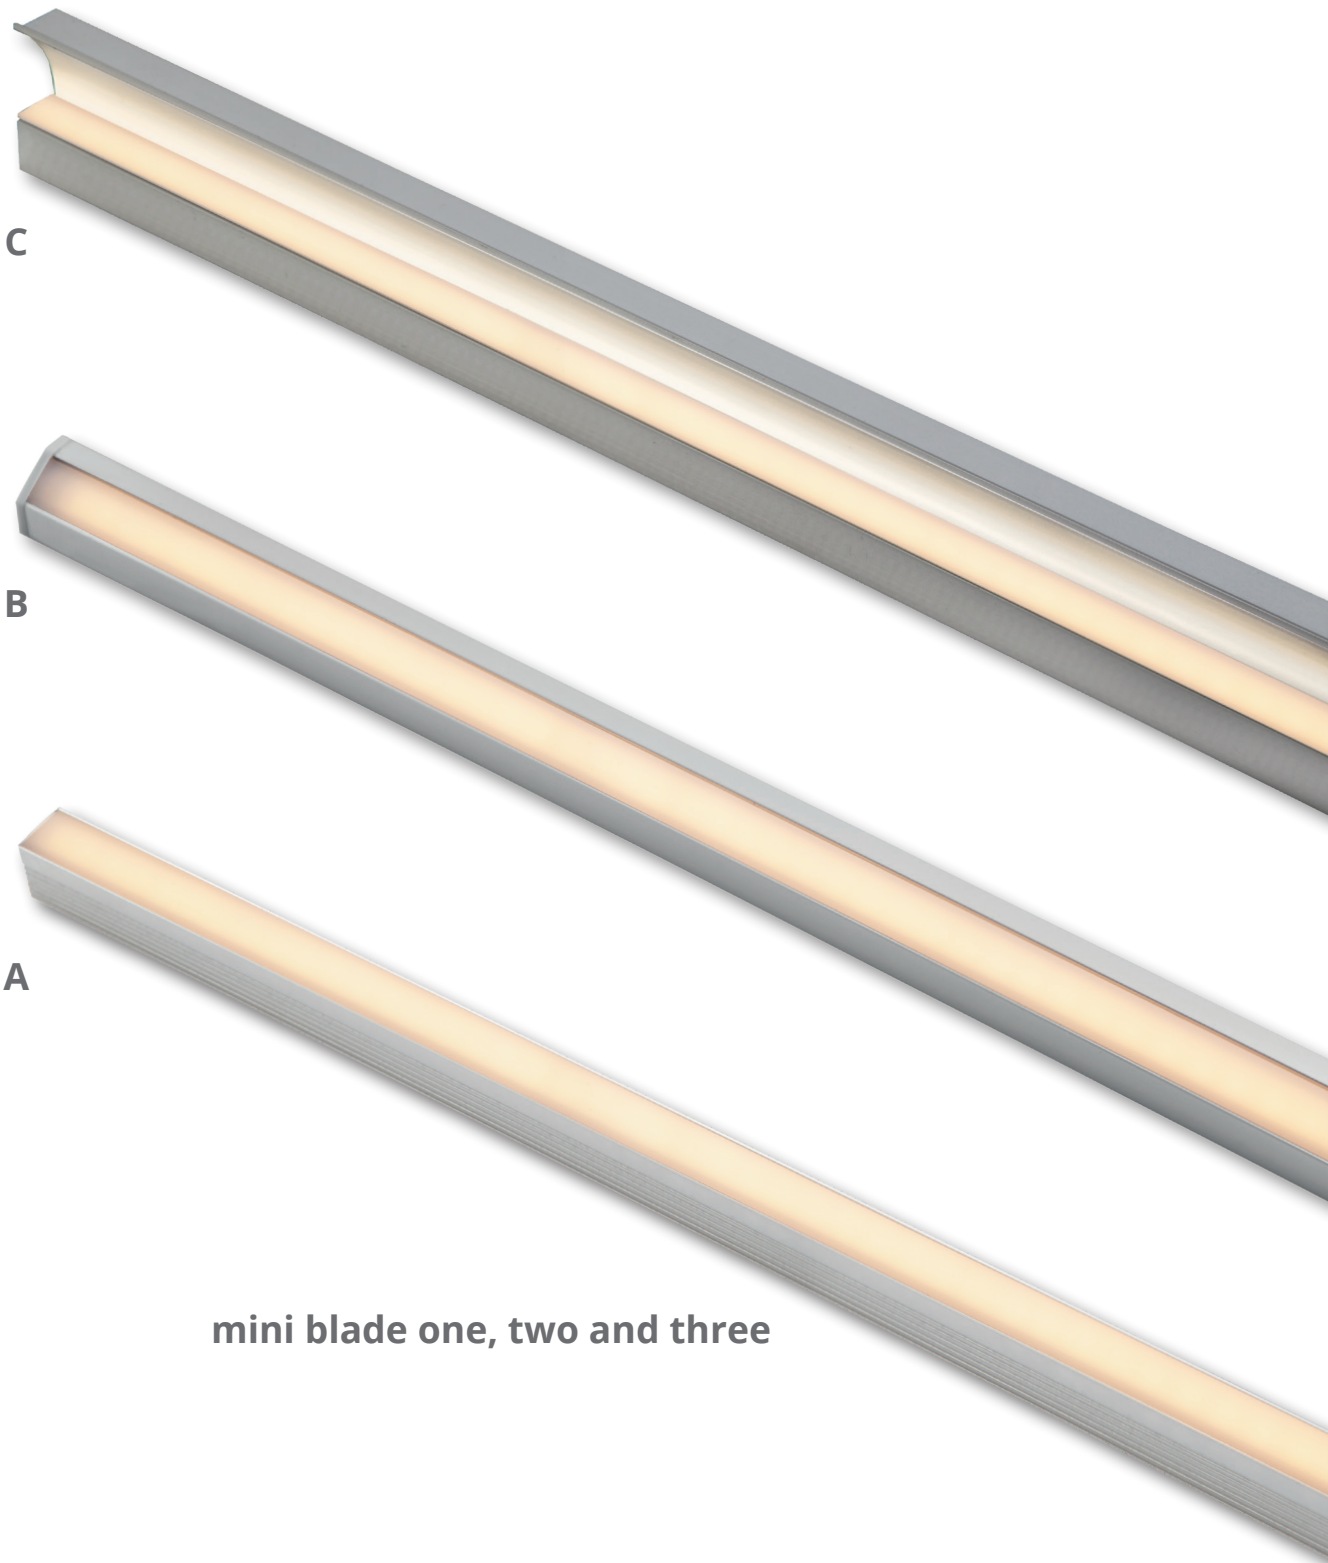

mini blade one, two and three

blade one

one . A




CODE	5070-P18
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ACCESSORIES

CAPS 2X	5070-MEC18	
T CONNECTION	5070-C18T	
L CONNECTION	5070-C18L	
X CONNECTION	5070-C18X	
BAND CLIP	5070-SPR18	

one . B




CODE	5070-P46
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ACCESSORIES

CAPS 2X	5070-MEC46	
T CONNECTION	5070-C46T	
L CONNECTION	5070-C46L	
X CONNECTION	5070-C46X	
BAND CLIP	5070-SPR46	


one . C



CODE	5070-P48
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ACCESSORIES


CAPS 2X	5070-MEC48	
T CONNECTION	5070-C48T	
L CONNECTION	5070-C48L	
X CONNECTION	5070-C48X	
BAND CLIP	5070-SPR48	

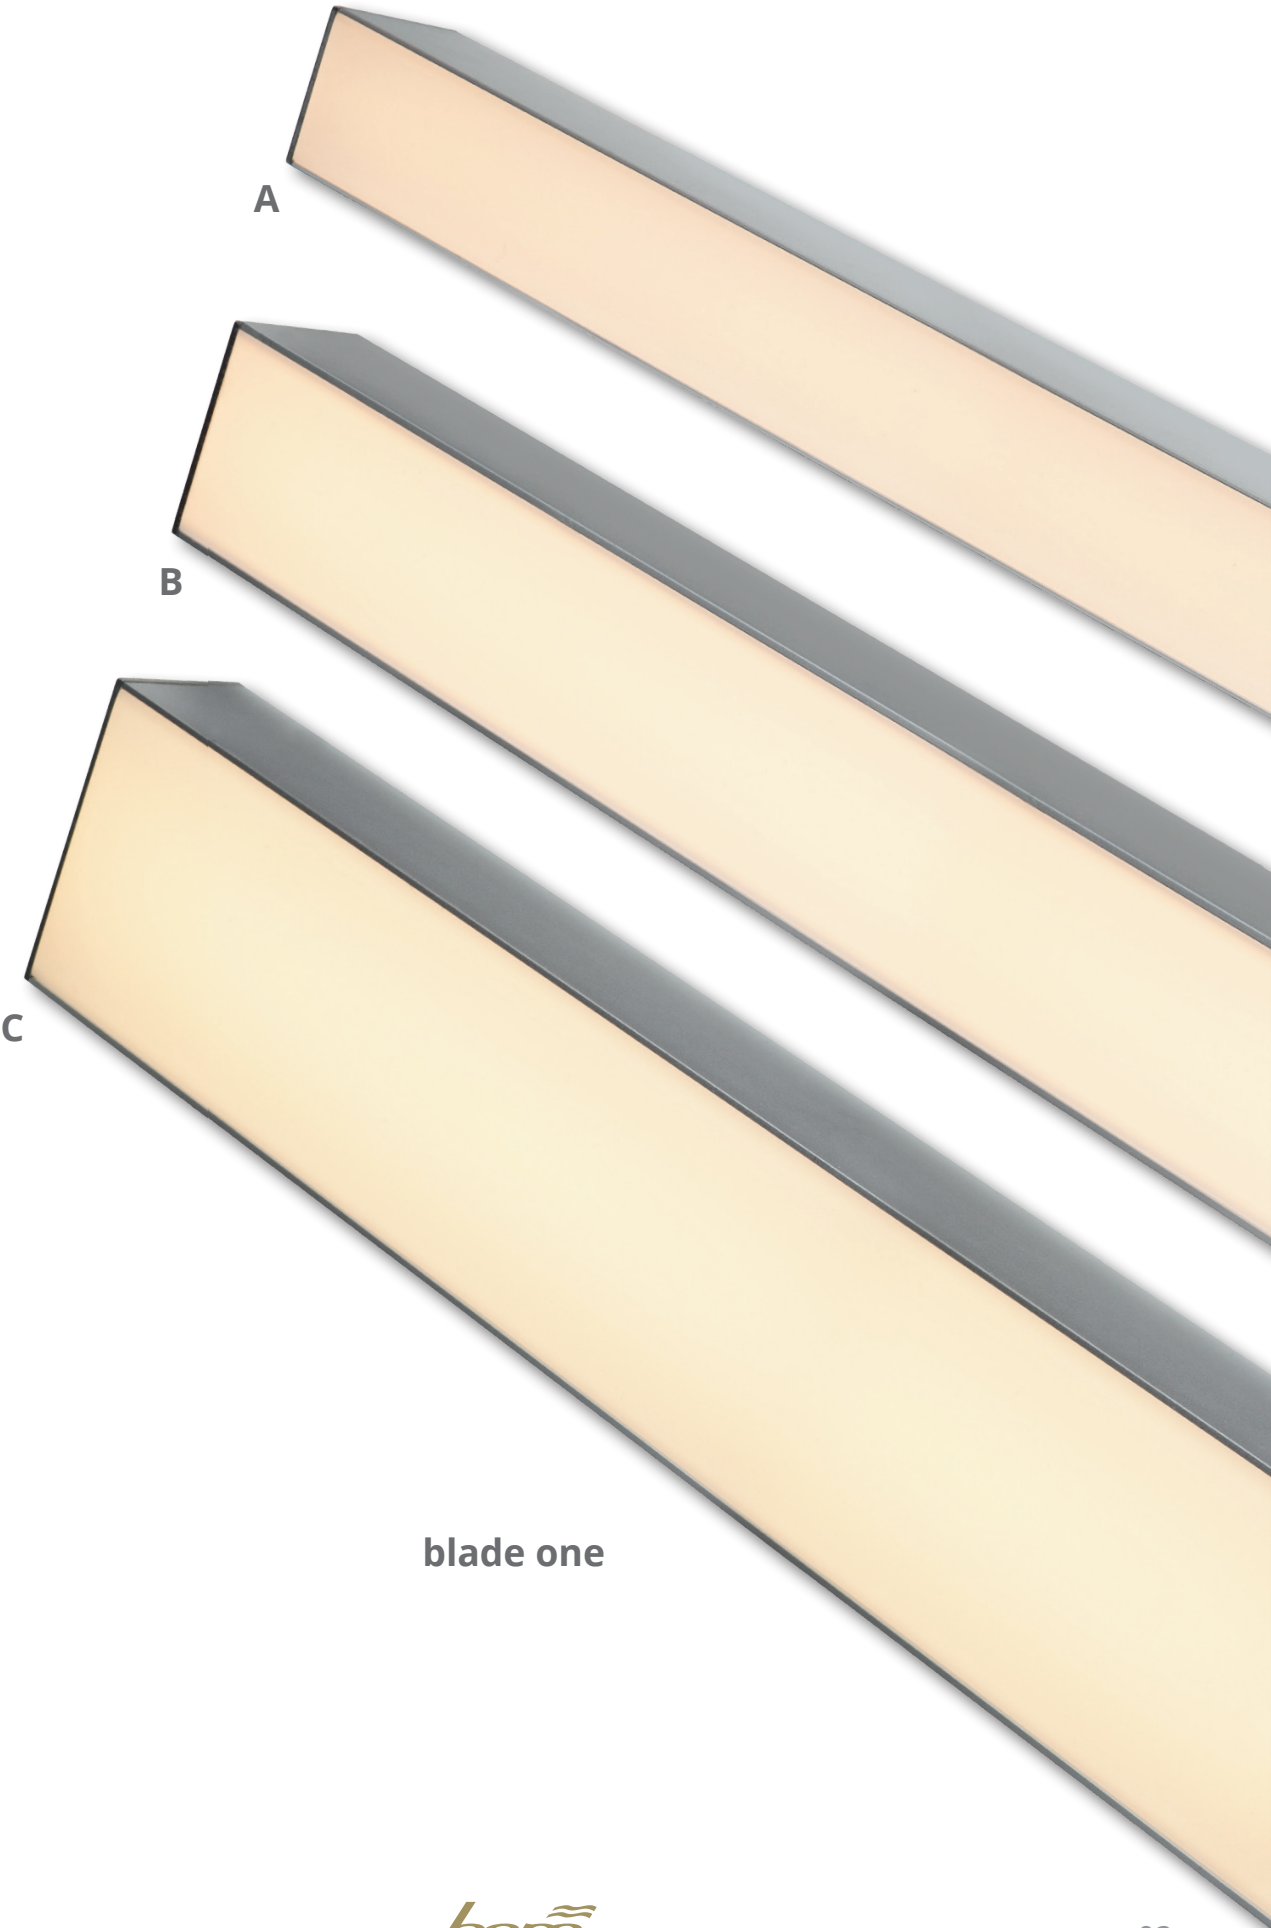


blade one

blade two


two . A





two . B




two . C




CODE	5070-P17
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ACCESSORIES	
CAPS 2X	5070-MEC17 
T CONNECTION	5070-C17T 
L CONNECTION	5070-C17L 
X CONNECTION	5070-C17X 
FIXING BRIDGE	5070-MCB17 
SPRINGS	5070-SPR17 

5070-P45
OPAL
BODY: ALUMINIUM
SCREWS

5070-MEC45	
5070-C45T	
5070-C45L	
5070-C45X	
5070-MCB45	
5070-SPR45	

5070-P47
OPAL
BODY: ALUMINIUM
SCREWS

5070-MEC47	
5070-C47T	
5070-C47L	
5070-C47X	
5070-MCB47	
5070-SPR47	

A


B

C

blade two

blade three

three . A




CODE	5070-LP02
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH
SMOKED SCREEN VERSION

ACCESSORIES	
CAPS 2X	5070-PEC02
PLASTIC CLIP	5070-PC02
METAL CLIP	5070-MC02

three . B




CODE	5070-LP04
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH
SMOKED SCREEN VERSION


5070-PEC04	
5070-PC04	
5070-MC04	

three . C



CODE	5070-LP05
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS


5070-PEC05	
5070-PC05	
5070-MC05	

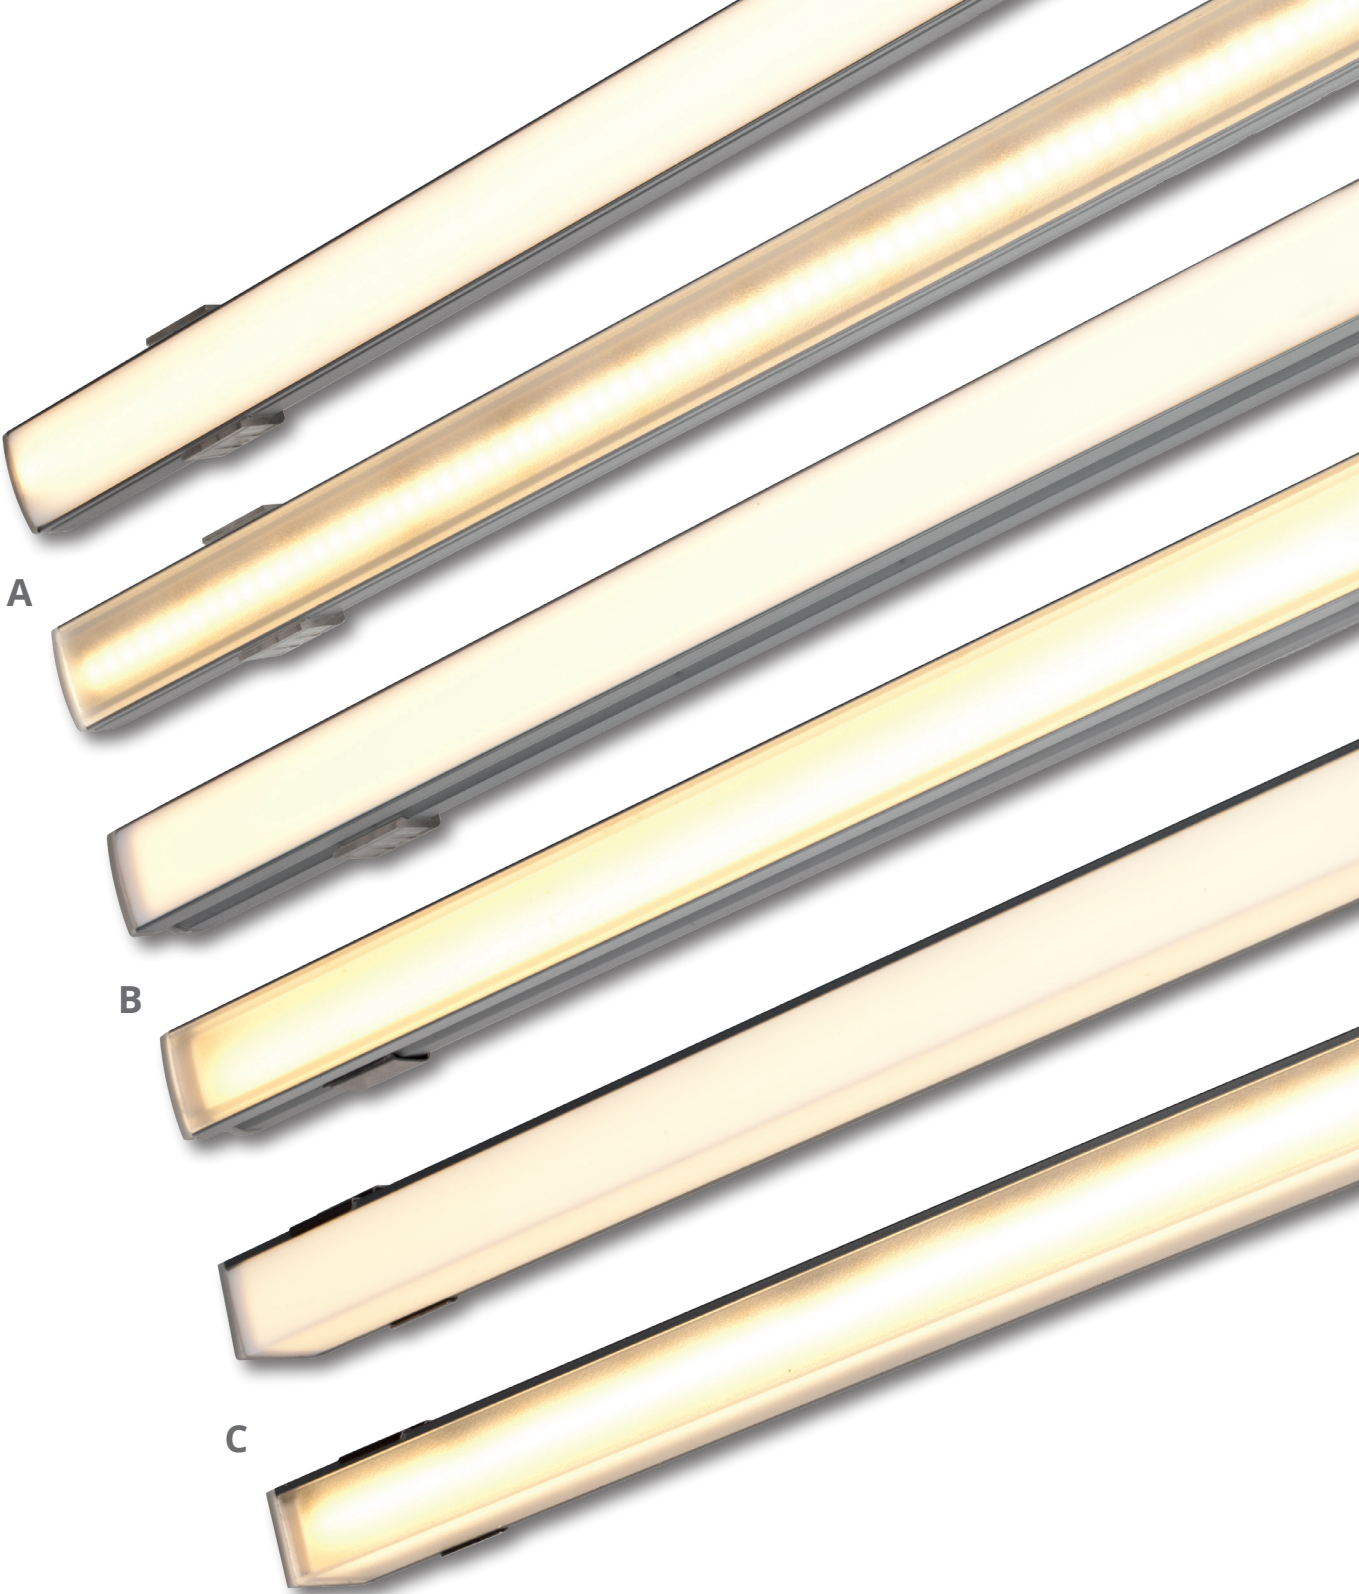

blade three

blade four


four . A



CODE	5070-LP01
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS


ACCESSORIES	
CAPS 2X	5070-PEC01

four . B





CODE	5070-LP03
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS


ACCESSORIES	
CAPS 2X	5070-PEC03

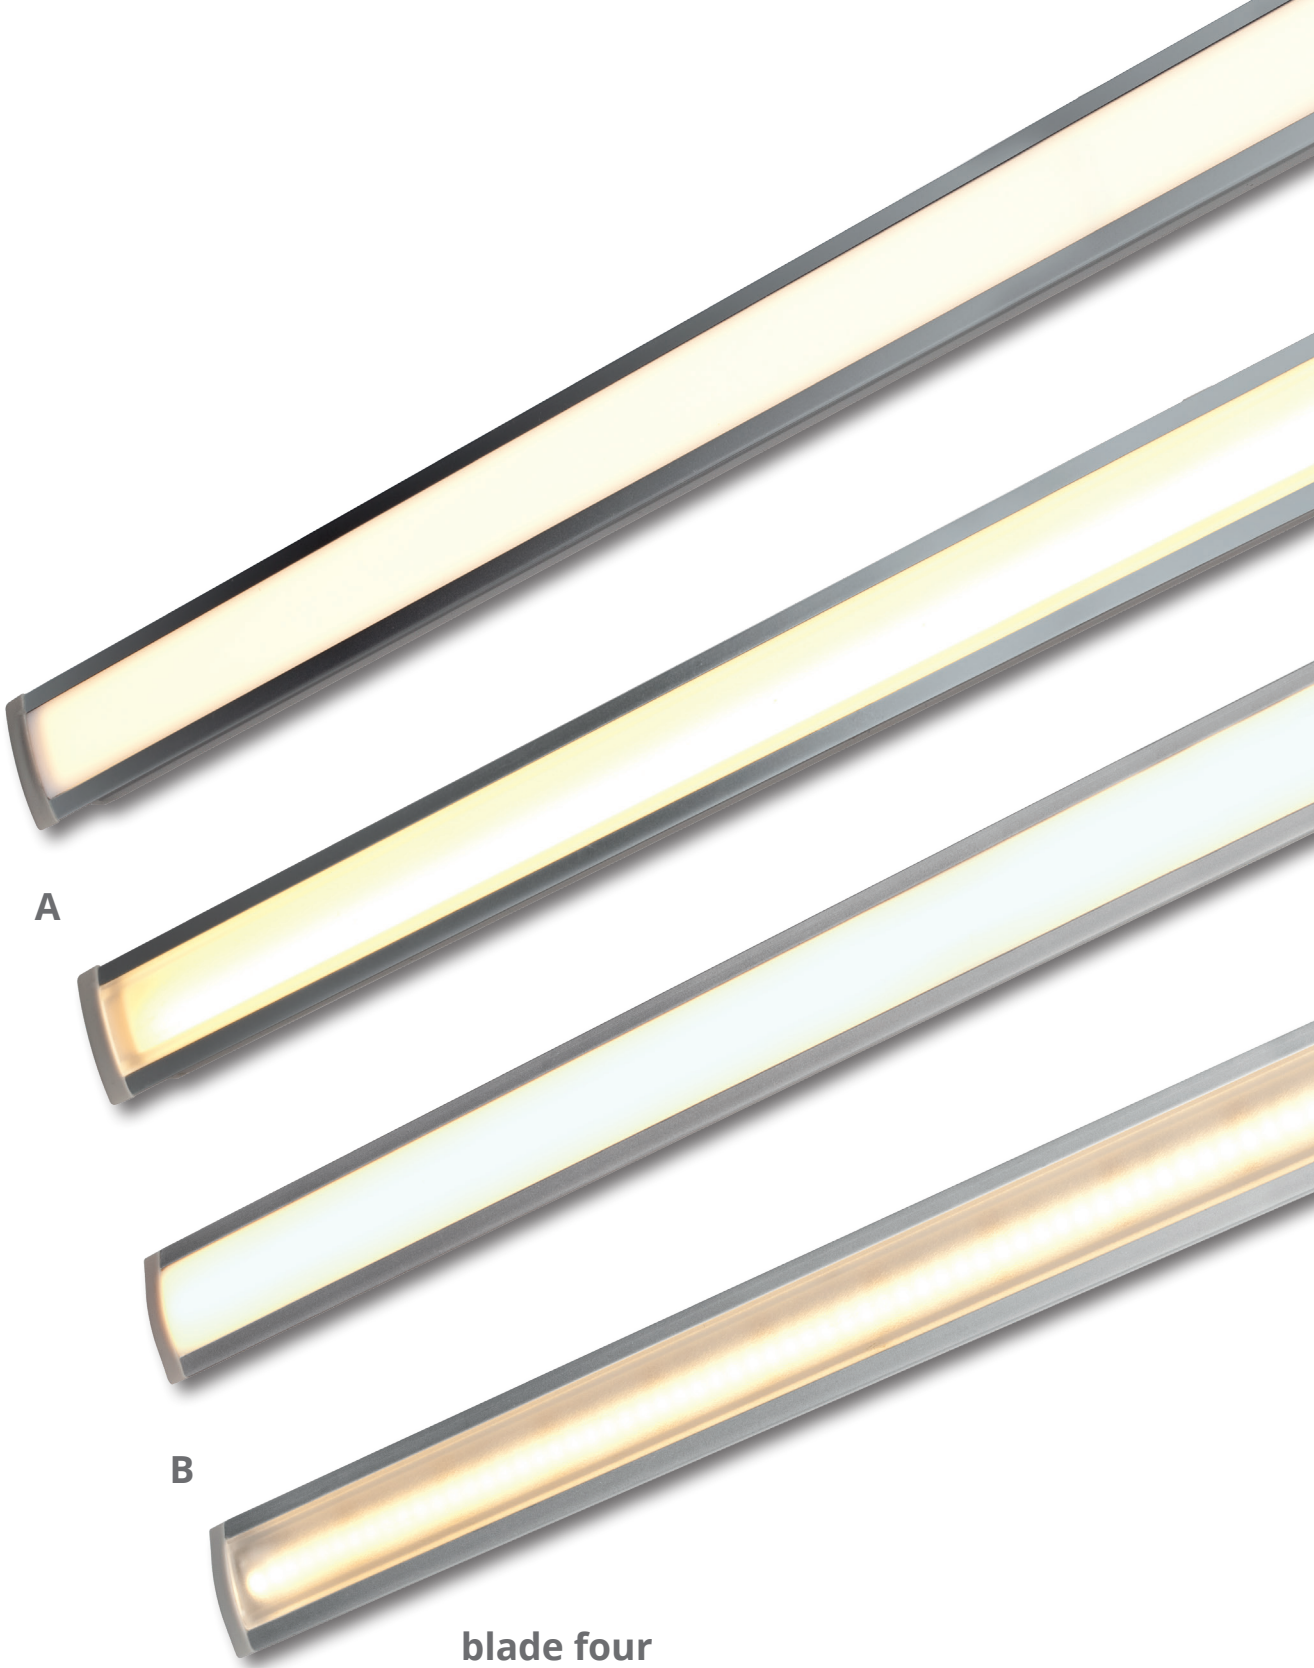

blade five



CODE	5070 -LP23
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC23 

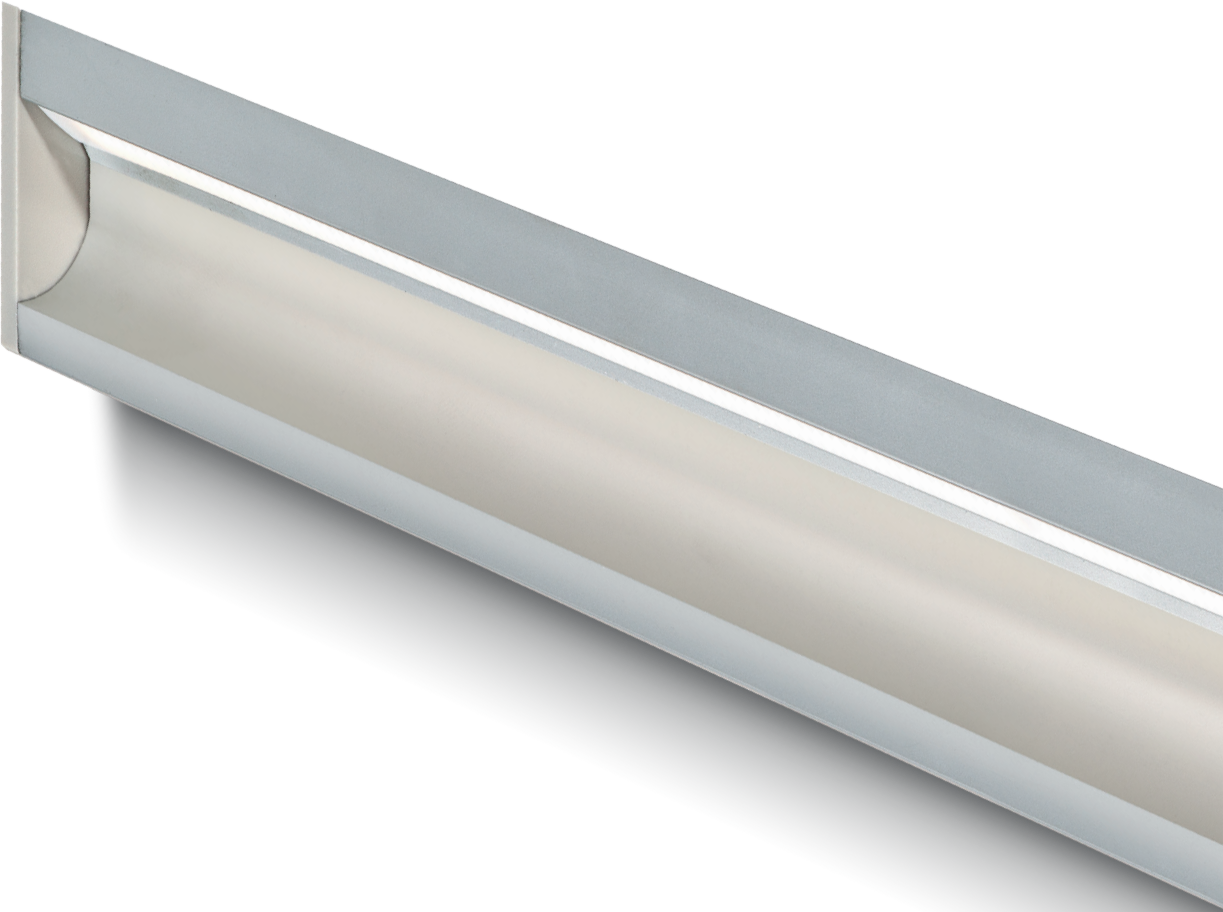


blade five




mini flex led one

. 240-TOP




CODE	5337-240NV-10WM
FIXTURE	SLIM FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	240LED/MT - 10W/MT
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >90 LMN 700lm/m
IP RATE	
WEIGHT	
MOUNTING SYSTEM	
MATERIALS	
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 240IP-TOP







5337-240NVP-10WM
SLIM FLEX LED
NO
POWER LED
240LED/MT - 10W/MT
24 Vdc
YES
WIDE
OPAL
3000K CRI >90 LMN 700lm/m IP65
2700K - 4000K

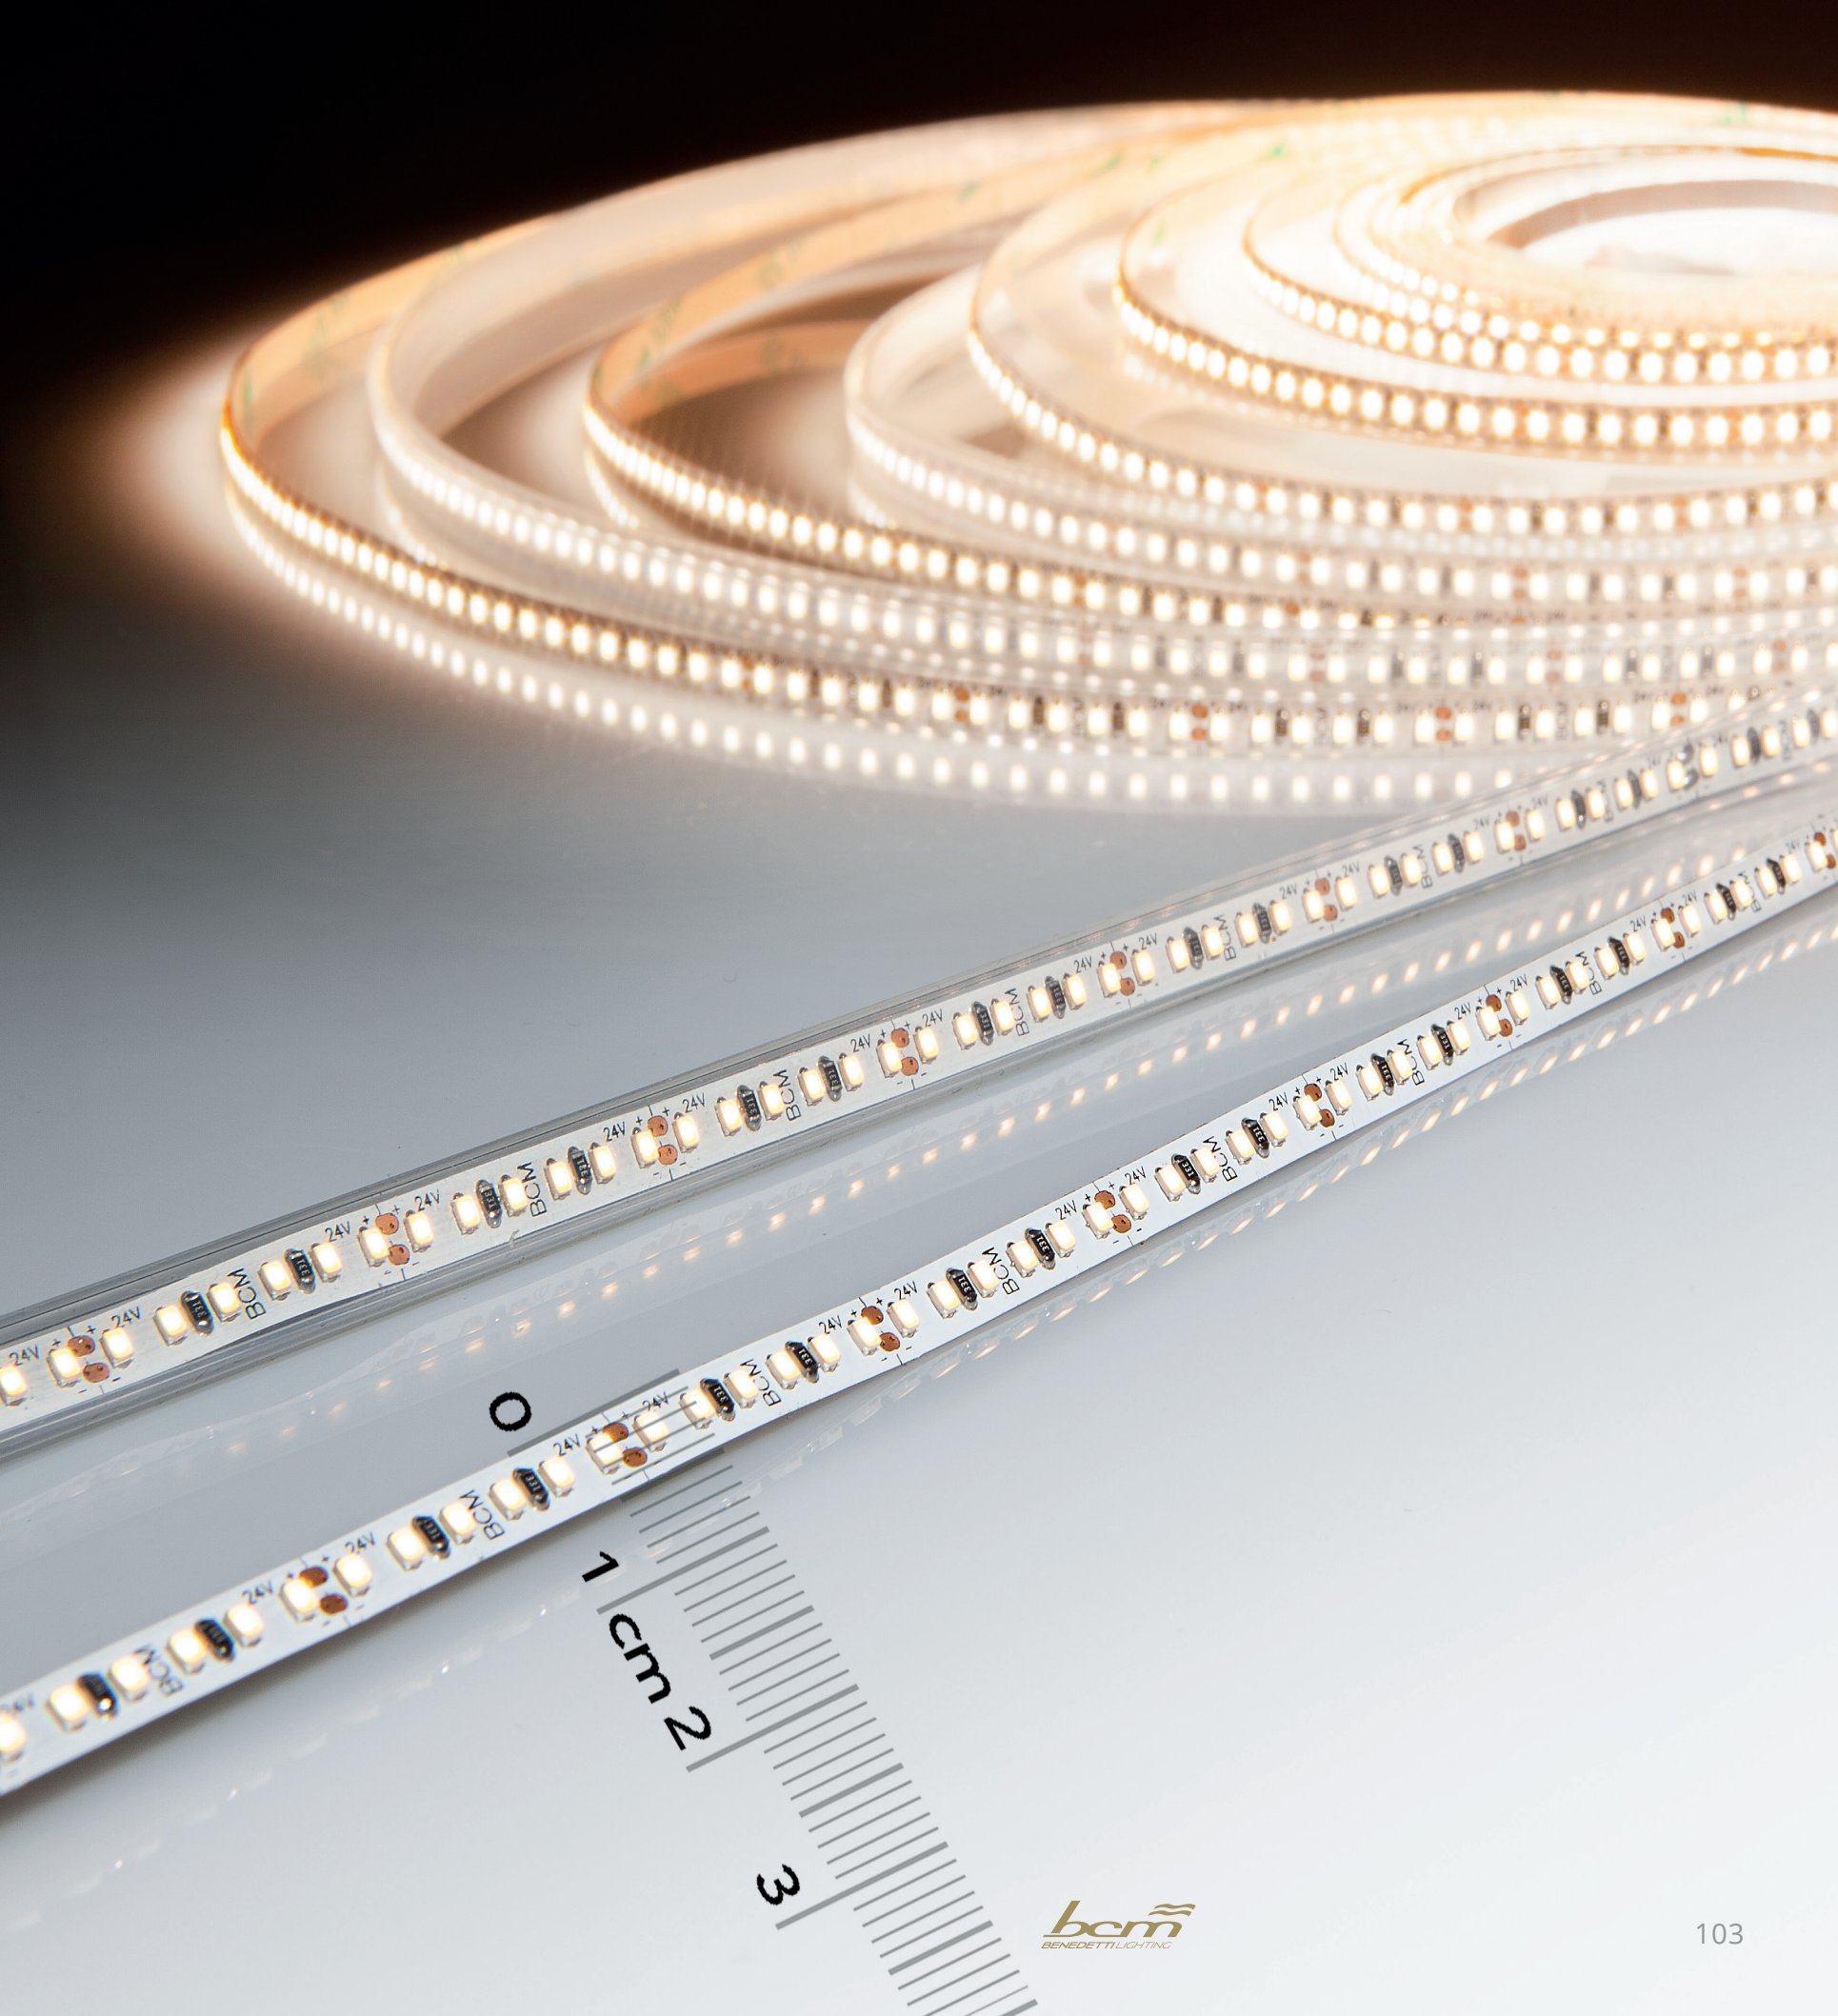




flex led two

. 60



. 240



CODE	5338-60MC-5WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	60LED/MT - 5W/MT
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 340lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL LED COLOUR	2700K
IP RATE	

CODE	5338-60MCP-5WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	60LED/MT - 5W/MT
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 340lm/m
IP RATE	IP67
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL LED COLOUR	2700K
IP RATE	


CODE	5338-120MC-10WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	120LED/MT - 10W/MT
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 700lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL LED COLOUR	2700K
IP RATE	

CODE	5338-120MCP-10WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	120LED/MT - 10W/MT
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 700lm/m
IP RATE	IP67
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL LED COLOUR	2700K
IP RATE	

CODE	5337-240MV-20WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	240LED/MT - 20W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 1600lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL LED COLOUR	2700K
IP RATE	

* For proper use, install this strip on heatsink.



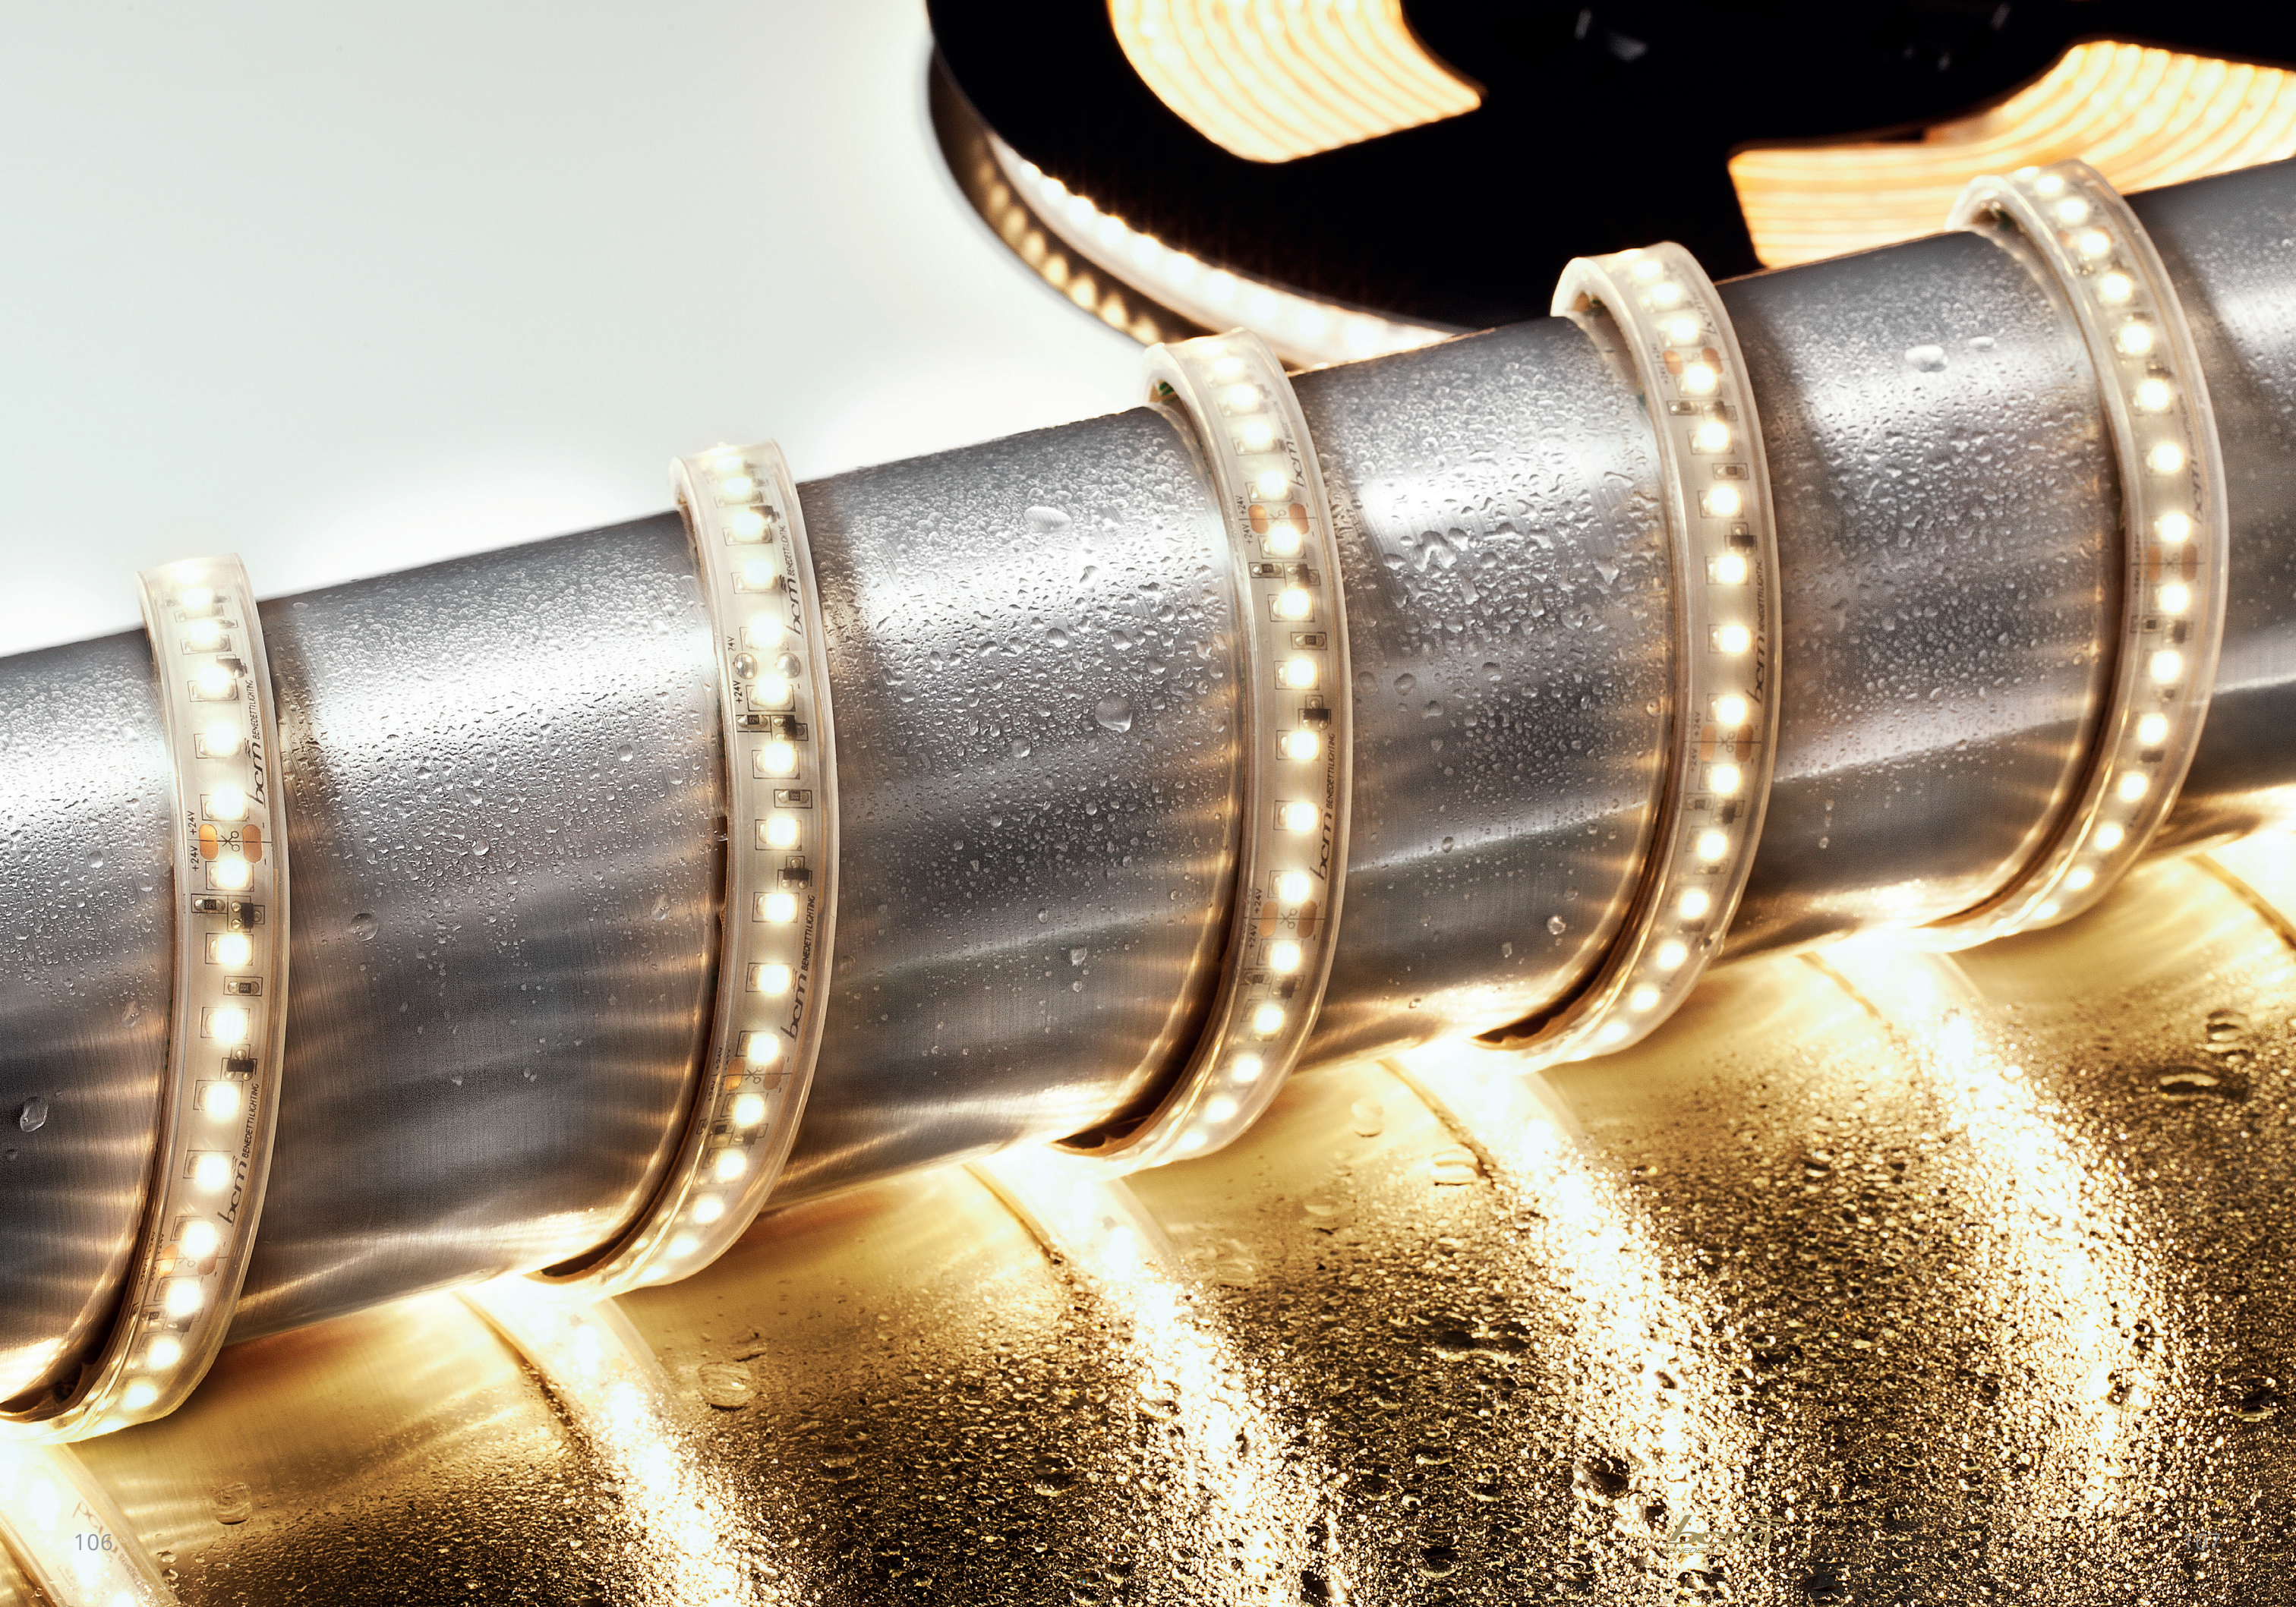

casseforme
recess mounting box








FIG.	COD.	ART.
	9000-CAS26-A	3411-90A-B6W 3412-95A-B6W 3413-90A-B6W 3414-95A-B4W 3415-90A-B4W
	9000-CAS27-A	3411-80A-B4W 3412-85A-B4W 3413-80A-B4W 3414-85A-B2W 3415-80A-B2W 3419-87A-B4W 3419-87AS-B4W 3443-82A-B4W 3443-A82S-B4W
	9000-CAS28-A	3411-70A-B2W 3412-75A-B2W 3413-70A-B2W 3419-77A-B2W 3419-77AS-B2W 3443-72A-B2W 3443-72AS-B2W
	9000-CAS33-A	3405-70A-B2W 3406-75A-B2W 3407-70A-B2W 3418-77A-B2W 3418-77AS-B2W 3422-75A-B2W 3423-75A-B2W 3442-72A-B2W 3442-72AS-B2W

FIG.	COD.	ART.
	9000-CAS43-A	3411-55A-B1.5W 3412-60A-B1.5W 3413-55A-B1.5W
	9000-CAS44-A	3405-55A-B1.5W 3406-60A-B1.5W 3407-55A-B1.5W 3422-60A-B1.5W 3423-60A-B1.5W
	9000-CAS45-A	3405-80A-B4W 3406-85A-B4W 3407-80A-B4W 3408-85A-B2W 3409-80A-B2W 3422-85A-B4W 3423-85A-B4W 3418-87A-B4W 3418-87AS-B4W 3442-82A-B4W 3442-A82S-B4W
	9000-CAS46-A	3405-90A-B6W 3406-95A-B6W 3407-90A-B6W 3408-95A-B4W 3409-90A-B4W 3422-95A-B6W 3423-95A-B6W

PAG.			PAG.			PAG.		
2182-I-Z1.5W	CATALINA	66	3412-75A-B2W	MALIBÙ 75A	14	3423-85A-B4W	CALIFORNIA 85A	50
2184-I-Z1.5W	VENTURA	68	3412-85A-B4W	MALIBÙ 85A	14	3423-85C-B4W	CALIFORNIA 85C	50
2185-I-Z1.5W	ARIZONA	70	3412-95A-B6W	MALIBÙ 95A	15	3423-95A-B6W	CALIFORNIA 95A	51
2186-I-B3W	PHILLY	72	3413-55A-B1.5W	SEATTLE 55A	22	3423-95C-B6W	CALIFORNIA 95C	51
3405-55A-1.5W	MIAMI 55A	32	3413-70A-B2W	SEATTLE 70A	22	3432-40-B1.5W	SAVANNAH 40	52
3405-55C-1.5W	MIAMI 55C	32	3413-80A-B4W	SEATTLE 80A	22	3442-72A-B2W	ANCHORAGE 72A	40
3405-70A-B2W	MIAMI 70A	32	3413-90A-B6W	SEATTLE 90A	23	3442-72AS-B2W	ANCHORAGE 72AS	40
3405-70C-B2W	MIAMI 70C	32	3414-85A-B2W	NEWPORT 85A	16	3442-72C-B2W	ANCHORAGE 72C	40
3505-80A-B4W	MIAMI 80A	32	3414-95A-B4W	NEWPORT 95A	16	3442-72CS-B2W	ANCHORAGE 72CS	40
3505-80C-B4W	MIAMI 80C	32	3415-80A-B2W	ATLANTA 80A	24	3442-82A-B4W	ANCHORAGE 82A	40
3405-90A-B6W	MIAMI 90A	33	3415-90A-B4W	ATLANTA 90A	24	3442-82AS-B4W	ANCHORAGE 82AS	40
3405-90C-B6W	MIAMI 90C	33	3416-40-Z1.5W	TAMPA 40	54	3442-82C-B4W	ANCHORAGE 82C	40
3406-60A-B1.5W	ORLANDO 60A	18	3417-40-Z1.5W	SARASOTA 40	54	3442-82CS-B4W	ANCHORAGE 82CS	40
3406-60C-B1.5W	ORLANDO 60C	18	3418-77A-B2W	ASPEN 77A	36	3443-72A-B2W	ALASKA 72A	38
3406-75A-B2W	ORLANDO 75A	18	3418-77AS-B2W	ASPEN 77AS	36	3443-72AS-B2W	ALASKA 72AS	38
3406-75C-B2W	ORLANDO 75C	18	3418-77C-B2W	ASPEN 77C	36	3443-82A-B4W	ALASKA 82A	38
3406-85A-B4W	ORLANDO 85A	18	3418-77CS-B2W	ASPEN 77CS	36	3443-82AS-B4W	ALASKA 82AS	38
3406-85C-B4W	ORLANDO 85C	18	3418-87A-B4W	ASPEN 87A	36	3450-20-1LED	DETROIT 20	62
3406-95A-B6W	ORLANDO 95A	19	3418-87AS-B4W	ASPEN 87AS	36	3451-20-1LED	BOSTON 20	62
3406-95C-B6W	ORLANDO 95C	19	3418-87C-B4W	ASPEN 87C	36	3452-35-1LED	COLUMBIA 35	58
3407-55A-B1.5W	CHARLOTTE 55A	26	3418-87CS-B4W	ASPEN 87CS	36	3453-35-1LED	DANA 35	60
3407-55C-B1.5W	CHARLOTTE 55C	26	3419-77A-B2W	COLORADO 77A	34	3454-35-1LED	NEVADA 35	58
3407-70A-B2W	CHARLOTT 70A	26	3419-77AS-B2W	COLORADO 77AS	34	3455-35-1LED	BALTIMORA 35	60
3407-70C-B2W	CHARLOTTE 70C	26	3419-87A-B4W	COLORADO 87A	34	3477-40G-1LED	DALLAS 40G	46
3407-80A-B4W	CHARLOTTE 80A	26	3419-87AS-B4W	COLORADO 87AS	34	3477-40U-1LED	DALLAS 40U	46
3407-80C-B4W	CHARLOTTE 80C	26	3420-40G-B1.5W	FLORIDA 40G	56	3478-40-1LED	BEDFORD 40	46
3407-90A-B6W	CHARLOTTE 90A	27	3420-40U-B1.5W	FLORIDA 40U	56	3479-105A-B8W	OCEAN 105A	10
3407-90C-B6W	CHARLOTTE 90C	27	3421-40G-B1.5W	PORTLAND 40G	56	3479-105C-B8W	OCEAN 105C	10
3408-85A-B2W	PHOENIX 85A	20	3421-40U-B1.5W	PORTLAND 40U	56	3479-130A-B10W	OCEAN 130A	10
3408-85C-B2W	PHOENIX 85C	20	3422-60A-B1.5W	ALABAMA 60A	42	3479-130C-B10W	OCEAN 130C	10
3408-95A-B4W	PHOENIX 95A	20	3422-60C-B1.5W	ALABAMA 60C	42	3479-155A-B12W	OCEAN 155A	10
3408-95C-B4W	PHOENIX 95C	20	3422-75A-B2W	ALABAMA 75A	42	3479-155C-B12W	OCEAN 155C	10
3409-80A-B2W	DAYTONA 80A	28	3422-75C-B2W	ALABAMA 75C	42	3479-210A-B18W	OCEAN 210A	11
3409-80C-B2W	DAYTONA 80C	28	3422-85A-B4W	ALABAMA 85A	42	3479-210C-B18W	OCEAN 210C	11
3409-90A-B4W	DAYTONA 90A	28	3422-85C-B4W	ALABAMA 85C	42	9000-RING130	RING130	12
3409-90C-B4W	DAYTONA 90C	28	3422-95A-B6W	ALABAMA 95A	43	9000-RING155	RING155	12
3411-55A-B1.5W	VENICE 55A	30	3422-95C-B6W	ALABAMA 95C	43	9000-RING180	RING180	12
3411-70A-B2W	VENICE 70A	30	3423-60A-B1.5W	CALIFORNIA 60A	50	9000-RING235	RING235	12
3411-80A-B4W	VENICE 80A	30	3423-60C-B1.5W	CALIFORNIA 60C	50	WAVE NEONFLEX		
3411-90A-B6W	VENICE 90A	31	3423-75A-B2W	CALIFORNIA 75A	50	5401-4MT-10WM	WAVE NEONFLEX TOP	78
3412-60A-B1.5W	MALIBÙ 60A	14	3423-75C-B2W	CALIFORNIA 75C	50			

PAG.			PAG.			PAG.		
5403-4MT-10WM	WAVE NEONFLEX SIDE	78	5070-P47	BLADE TWO C	94	5070-PEC04	END CAPS	96
5404-5MT-10WM	WAVE NEONFLEX SMALL	80	5070-P48	BLADE ONE C	92	5070-PEC05	END CAPS	96
5406-5MT-6WM	WAVE NEONFLEX MINI SIDE	84	5070-C17L	L CONNECTION	94	5070-PEC06	PLASTIC END CAPS	90
5407-5MT-6WM	WAVE NEONFLEX MINI TOP	84	5070-C17T	T CONNECTION	94			
5408-5MT-10WM	WAVE NEONFLEX DOUBLE BENDING	82	5070-C17X	X CONNECTION	94	5070-PEC07	PLASTIC END CAPS	90
			5070-C18L	L CONNECTION	92			
ACCESSOIRES WAVE NEONFLEX			5070-C18T	T CONNECTION	92	5070-PEC23	END CAPS	100
5401-PEC	PLASTIC END CAP	87	5070-C18X	X CONNECTION	92	5070-SPR17	SPRINGS	94
5401-PRO5	ALUMINIUM PROFILE	86	5070-C45L	L CONNECTION	94	5070-SPR18	BAND CLIP	92
5401-SPR	CLIPS	87	5070-C45T	T CONNECTION	94	5070-SPR45	SPRINGS	94
5403-PEC	PLASTIC END CAP	87	5070-C45X	X CONNECTION	94	5070-SPR46	BAND CLIP	92
5403-PRO6	ALUMINIUM PROFILE	87	5070-C46L	L CONNECTION	92	5070-SPR47	SPRINGS	94
5403-SPR	CLIPS	87	5070-C46T	T CONNECTION	92	5070-SPR48	BAND CLIP	92
5404-PEC	PLASTIC END CAP	87	5070-C46X	X CONNECTION	92	MINI FLEX LED / FLEX LED		
5404-PRO4	ALUMINIUM PROFILE	86	5070-C47L	L CONNECTION	94	5337-240NV-10WM	MINI FLEX LED ONE 240-TOP	102
5404-PRO11	PLASTIC PROFILE	86	5070-C47T	T CONNECTION	94			
5404-SPR	CLIPS	87	5070-C47X	X CONNECTION	94	5337-240NVP-10WM	MINI FLEX LED ONE 240IP-TOP	102
5406-PEC	PLASTIC END CAP	87	5070-C48L	L CONNECTION	92			
5406-PRO9	ALUMINIUM PROFILE	86	5070-C48T	T CONNECTION	92	5337-240MV-20WM	FLEX LED TWO 240	104
5406-SPR	CLIPS	87	5070-C48X	X CONNECTION	92			
5407-PEC	PLASTIC END CAP	87	5070-MC02	METAL CLIP	96	5338-60MC-5WM	FLEX LED TWO 60	104
5407-PRO10	ALUMINIUM PROFILE	86	5070-MC04	METAL CLIP	96			
5407-SPR	CLIPS	87	5070-MC05	METAL CLIP	96	5338-60MCP-5WM	FLEX LED TWO 60IP	104
5408-PEC	PLASTIC END CAP	87	5070-MC06	BAND CLIP	90			
5408-PRO12	ALUMINIUM PROFILE	86	5070-MC07	BAND CLIP	90	5338-120MC-10WM	FLEX LED TWO 120	104
5408-SPR	CLIPS	87	5070-MCB17	FIXING BRIDGE	94			
MINI BLADE BLADE			5070-MCB45	FIXING BRIDGE	94	5338-120MCP-10WM	FLEX LED TWO 120IP	104
			5070-MCB47	FIXING BRIDGE	94			
			5070-LP01	BLADE FOUR A	98	5070-MEC08	END CAPS	90
5070-LP02	BLADE THREE A	96	5070-MEC17	END CAPS	94	9000-CAS26-A	CASSAFORMA	108
5070-LP03	BLADE FOUR B	98	5070-MEC18	END CAPS	92	9000-CAS27-A	CASSAFORMA	108
5070-LP04	BLADE THREE B	96	5070-MEC45	END CAPS	94	9000-CAS28-A	CASSAFORMA	108
5070-LP05	BLADE THREE C	96	5070-MEC46	END CAPS	92	9000-CAS33-A	CASSAFORMA	108
5070-LP23	BLADE FIVE	100	5070-MEC47	END CAPS	94	9000-CAS43-A	CASSAFORMA	109
5070-P06	MINI BLADE ONE A	90	5070-MEC48	END CAPS	92	9000-CAS44-A	CASSAFORMA	109
5070-P07	MINI BLADE TWO B	90	5070-PC02	PLASTIC CLIP	96	9000-CAS45-A	CASSAFORMA	109
5070-P08	MINI BLADE THREE C	90	5070-PC04	PLASTIC CLIP	96	9000-CAS46-A	CASSAFORMA	109
5070-P17	BLADE TWO A	94	5070-PC05	PLASTIC CLIP	96			
5070-P18	BLADE ONE A	92	5070-PEC01	END CAPS	98			
5070-P45	BLADE TWO B	94	5070-PEC02	END CAPS	96			
5070-P46	BLADE ONE B	92	5070-PEC03	END CAPS	98			

Desideriamo ringraziare tutti coloro che nella lunga storia della nostra azienda hanno contribuito con capacità, serietà e impegno a fare del marchio BCM il riferimento di eccellenza nella produzione di apparecchi per illuminazione. Un successo la cui parte integrante sono i nostri clienti, tra i più prestigiosi cantieri e designers nel settore della nautica, importanti architetti e operatori nel settore residenziale e "contract", che continuano a privilegiare la scelta dei nostri prodotti ritenendoli esempio di stile, affidabilità e sicurezza.

We wish to thank all those who in the long history of our company have contributed with ability, professionalism and commitment towards making the BCM brand a landmark of excellence in the production of lighting fixtures. Our customers, who form an integral part of our success and include the most prestigious shipyards and designers in the nautical field, as well as important architects and operators in the residential and "contract" sectors, continue to prefer our range of products for their cutting-edge style, reliability and safety.



Nice to see you

L'azienda si riserva il diritto, in qualsiasi momento e senza preavviso, di eliminare gli articoli che riterrà opportuno e/o di apportare tutte le modifiche atte a migliorare il prodotto. Non può inoltre assumersi responsabilità per eventuali inesattezze del presente catalogo dovute ad errori di stampa, trascrizione e traduzione.

The company reserves, at any moment and without prior notice, the right to discontinue producing or to modify whichever item with the purpose of improving quality. The company can not take the responsibility for any errors present in this catalogue due to misprint, mistakes in copying and translation.

BCM illuminazione srl

Via G. Pastore, 2
55041 Capezzano Pianore
Lucca · Italia
Tel. +39 0584 969632
Fax +39 0584 969578

www.bcmilluminazione.com
info@bcmilluminazione.com

Art Direction and Supervision
GERECON ITALIA · Edoardo Brogini

Printed in Italy
LRC Printing

©BCM illuminazione 2022



