

NOAM N4


4" 2-Way Marine Speaker

FEATURES

- 4" High Quality Poly Injection Cone
- Butyl Rubber Surround
- Shiny Black Plastic Enclosure
- 1" High Temperature KEISV Voice Coil
- 1" PEI Neodymium Dome Tweeter
- 100 Watts RMS/200 Watts Peak
- Frequency Response: 100Hz-20KHz
- Impedance: 4 Ohms
- Speaker Enclosure Dimensions:
5.43"(L) x 7.4"(W) x 7.28"(H)



INSTALLATION INSTRUCTIONS:

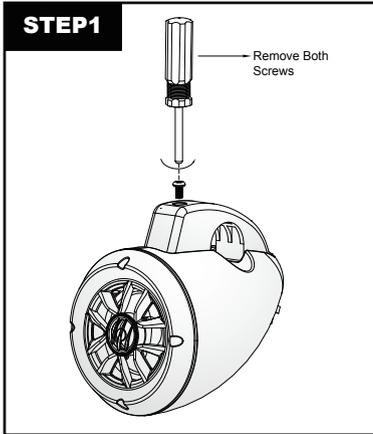


STEP 1

Remove Both
Screws

YOU'LL NEED: A SCREW DRIVER

Remove the two screws from the bracket to separate the Speaker case and the bracket.

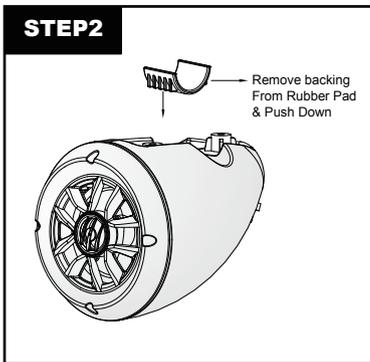


STEP 2

Remove backing
From Rubber Pad
& Push Down

YOU'LL NEED: THE RUBBER PAD TO ADJUST THE SIZE OF THE MOUNTING BRACKET

Remove the backing from the Rubber Pad and stick on the mounting surface

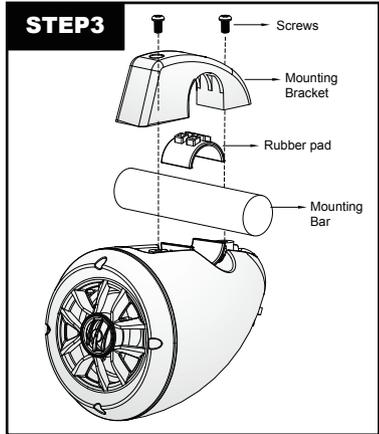

STEP 3

Screws


Mounting
Bracket

Rubber pad

Mounting
Bar

YOU'LL NEED: 2 SCREWS, MOUNTING BRACKET, RUBBER PAD AND THE MOUNTING BAR

Mount the speaker on the bar where you want. The mounting dimension is available from 1.25" ~ 2".

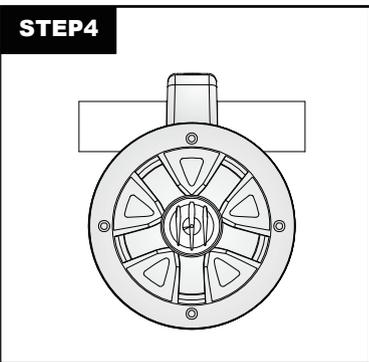

STEP 4

**FINISHED INSTALLATION !!
BEGIN ENJOYING YOUR MUSIC !!**

NOTE

Rubber Pad in 3 Specification:	Rubber Pad Quantity You Need for Each Mounting Dimension:
Pad No.1: 76X30X2mm* 6PCS	2" Bar: Pad No.1* 2PCS
Pad No.2: 140x30x3mm*4PCS	1.75" Bar: Pad No.1*2PCS and Pad No. 2*1PC
Pad No.3: 38x30x3mm*4PCS	1.5" Bar: Pad No.1*2PCS and Pad No. 2*2PCS
	1.25" Bar: Pad No.1*2PCS and Pad No. 2*3 PCS

Attention: Please Cut Pad No.2 into the Size You Need for Each Mounting Bar Size

Note: pad No.3 is an extra small pad that can be used in case you need an extra spacer for a better grip